

**EasyAir**

The Cladding Evolution







# Contents

|                                      |           |
|--------------------------------------|-----------|
| <b>EasyAir</b>                       | <b>6</b>  |
| <b>Air Technology</b>                | <b>8</b>  |
| <b>Surfaces</b>                      |           |
| Natural Air                          | 12        |
| UHPC Plus Air                        | 18        |
| <b>Sizes and Monolithic Elements</b> | <b>22</b> |
| <b>Outdoor System</b>                | <b>24</b> |
| <b>Indoor System</b>                 | <b>34</b> |
| <b>Processings</b>                   |           |
| Manual Cutting                       | 40        |
| Automatic Machines                   | 42        |
| <b>Services</b>                      | <b>44</b> |
| <b>Certifications</b>                | <b>46</b> |
| <b>Wind Resistance</b>               | <b>50</b> |
| <b>Code List</b>                     | <b>52</b> |
| <b>Packaging</b>                     | <b>54</b> |



EasyAir  
the easy-to-install, lightweight,  
and secure cladding system.

UHPC Ultralight Bianco. Panels 24x48" (610x1219 mm) and Internal corners 12x12x24" (305x305x610 mm)

# EasyAir

GammaStone is synonymous with creativity and excellence, qualities stemming from our experience in manufacturing integrated panels for facade systems. Thanks to our fully automated robotic production, we ensure a certified, versatile, and high-quality complete enclosure service.

Our new high-performance product, EasyAir, aims to bring our patented and innovative technology, previously dedicated only to large buildings, into every home. EasyAir is designed for both interior and exterior applications and can be tailored to meet any requirement through custom cutting during installation. It is also easy to install with our specially designed dry hanging system.




Natural Air. Limestone Beige - Honed. Panels 24x48" (610x1219 mm)



# Air Technology

EasyAir is made with the innovative patented GammaStone Air system, which is the main strength of our products, created using innovative technologies that make them extremely lightweight. Our panels exhibit high resistance to impact, bending, and compression, and they stand out for their thermal and acoustic efficiency. EasyAir can be manufactured using natural stone and UHPC (Ultra-High Performance Concrete), an advanced solution that ensures high-performance standards and unparalleled aesthetic beauty.

## Panels Structure

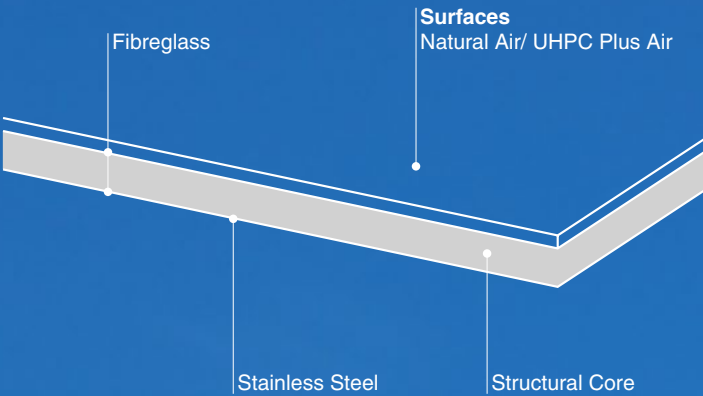

Standard Size



Easy to install



Extreme Lightness



Bending Resistant



Resistant to thermal shocks





Unique environments  
characterized by the beauty  
of natural materials.



UHPC Ultralight Crema. Panels 24x48" (610x1219 mm) and Limestone Beige. Panels 24x48" (610x1219 mm)

# Natural Air

GammaStone Natural Air in Limestone is our customized solution for EasyAir, allowing the creation of natural stone panels for both indoors and outdoors in any type of building. This solution bestows buildings with timeless beauty that exudes grandeur and sophisticatio.



Limestone Beige



Limestone Gray



Finish: Honed




Panel Dimension: 24x48” (610x1219 mm)



Panel Thickness: 43/64” (17 mm)



Limestone Beige - Honed. Panels 24x48” (610x1219 mm)

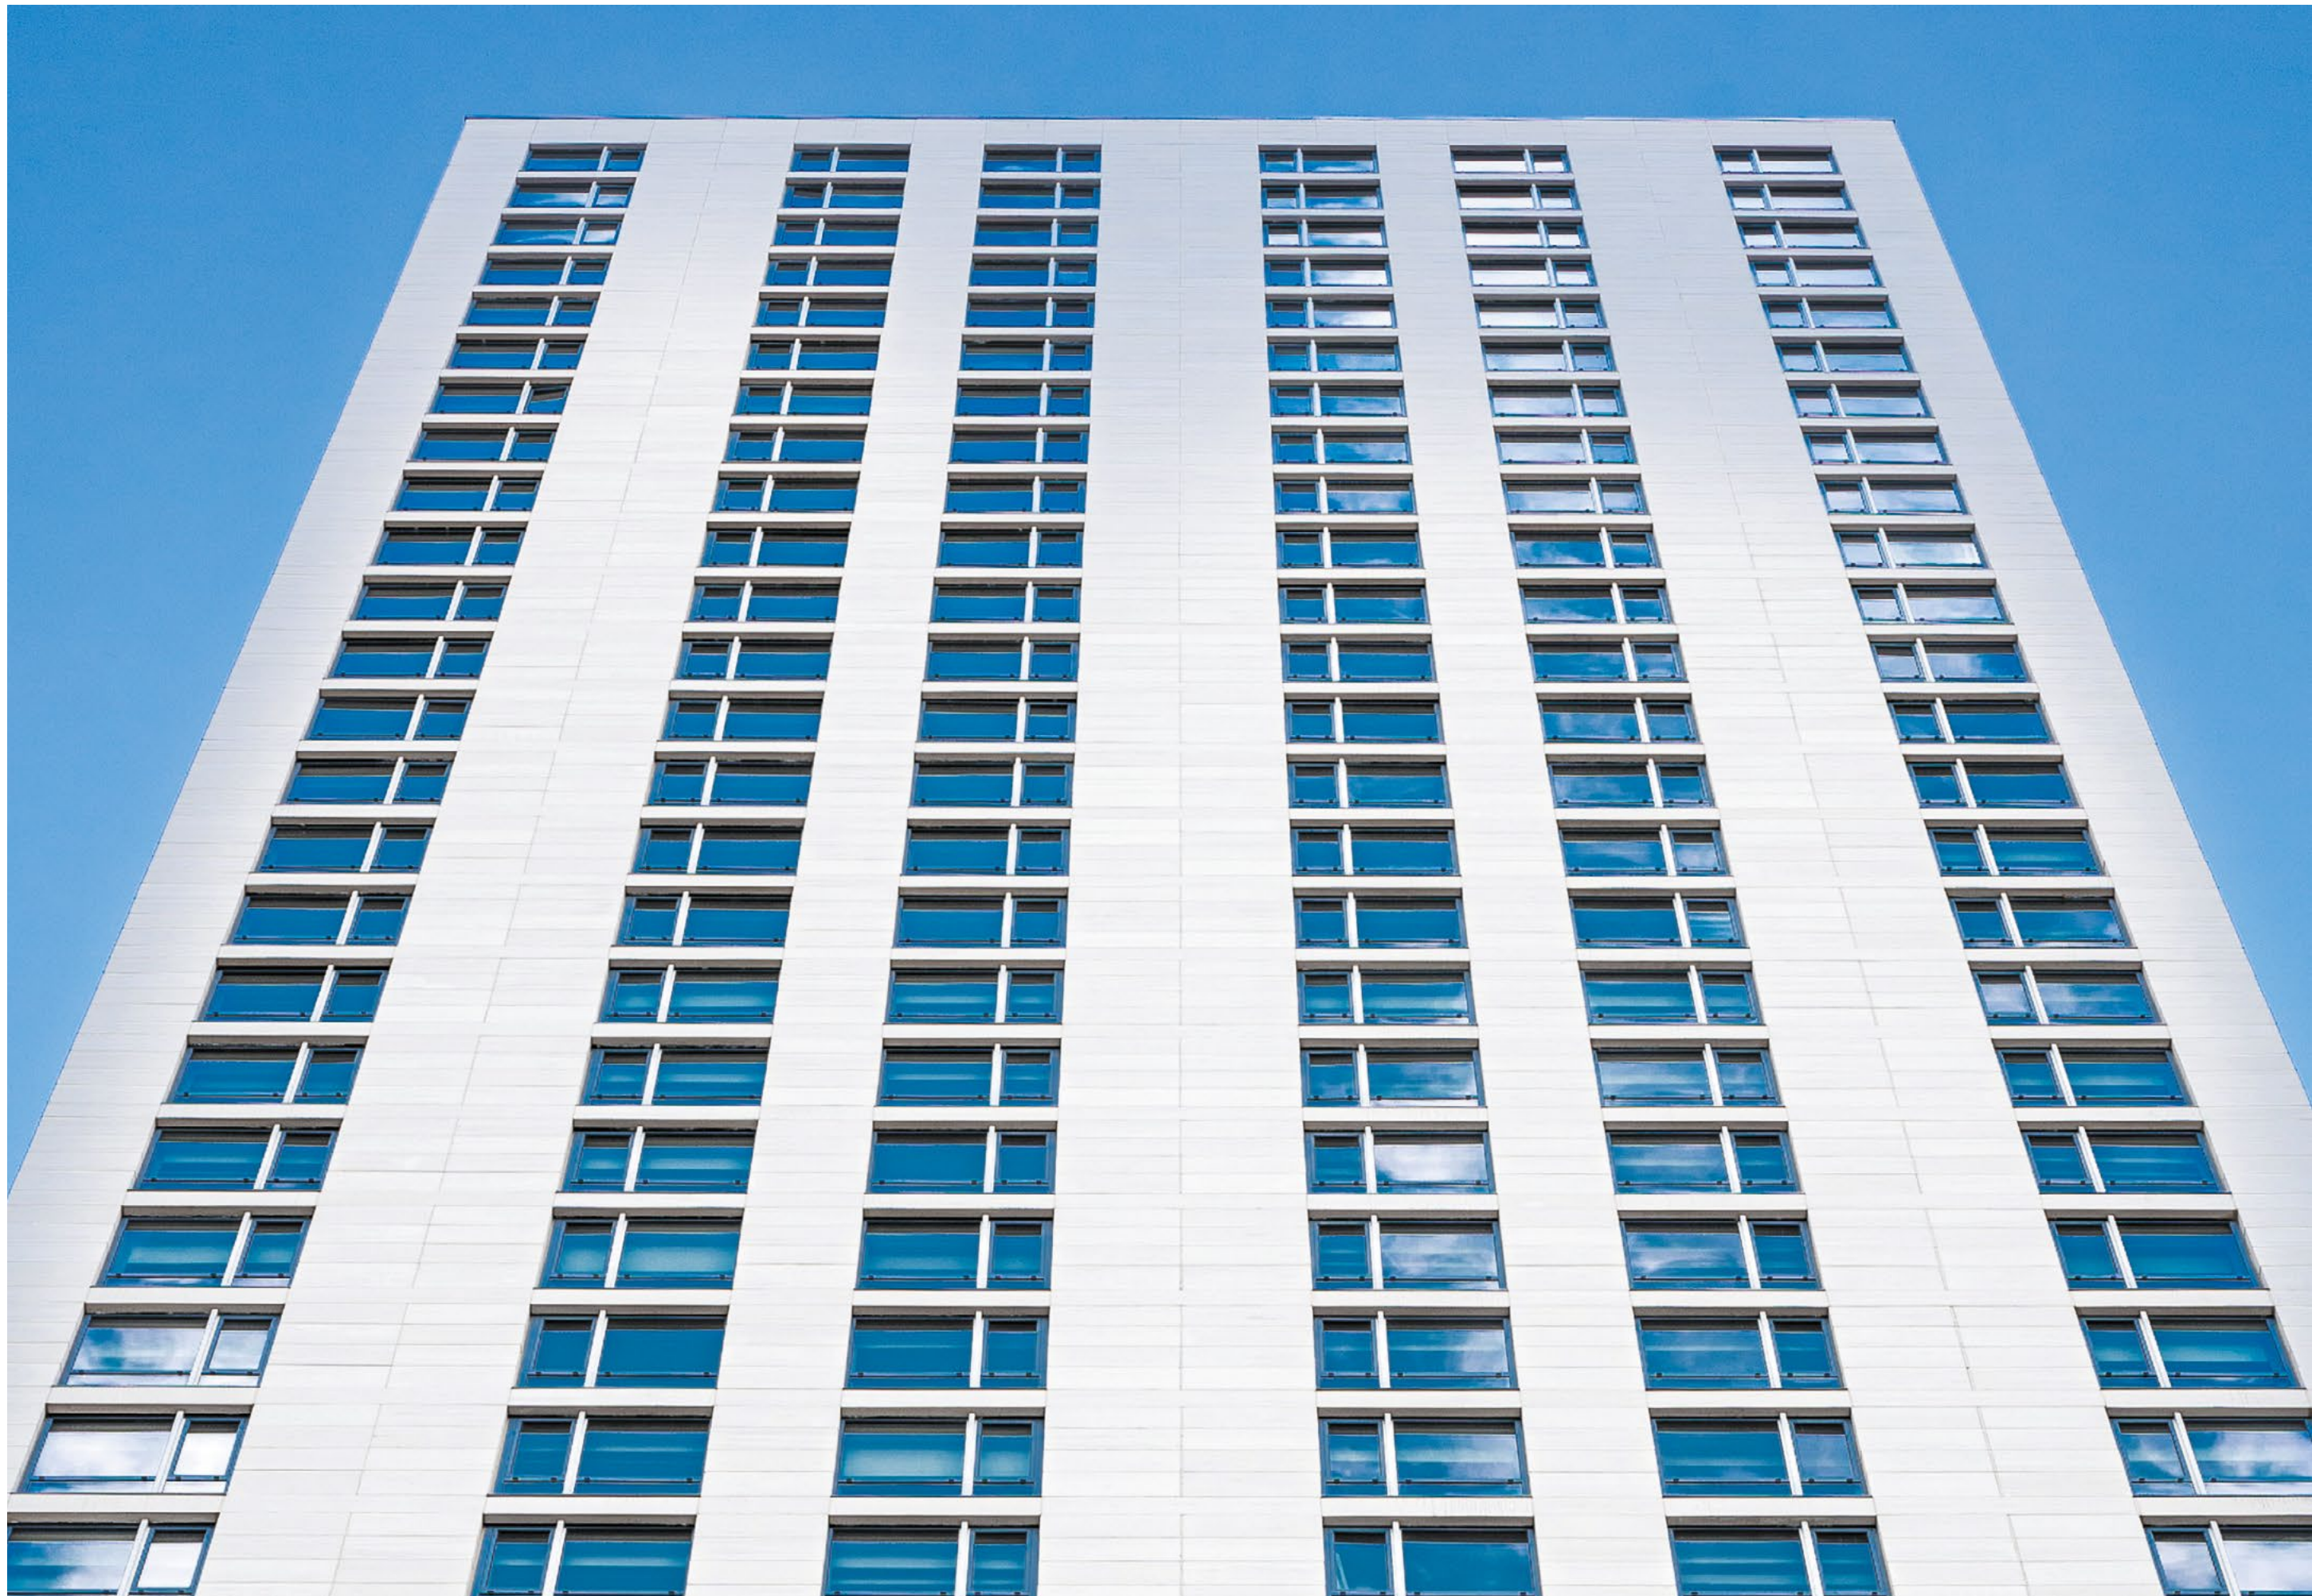

Limestone Beige - Honed. Panels 610x1219 mm



Limestone Gray - Honed. Panels 24x48" (610x1219 mm)

# UHPC Ultralight


GammaStone Ultralight è una soluzione innovativa e ultraleggera che rappresenta un'alternativa economica e ad alte prestazioni ai pannelli in alluminio e al GFRC. Con uno spessore di soli 14 mm, Ultralight è progettato per integrarsi perfettamente con il sistema EasyAir. Il nostro UHPC (Ultra-High Performance Concrete) offre una resistenza eccezionale e una straordinaria flessibilità, garantendo una durabilità superiore contro ogni tipo di sollecitazione naturale. Per EasyAir, abbiamo selezionato otto colori UHPC Ultralight Plain, ognuno studiato per rendere ogni struttura unica e inimitabile.



Bianco



Crema




Grigio Urbano



Giallo Imperiale



Verde Salvia



Terracotta



Rosso Mattone



Marrone Gesso



Finish: Textured



Panel Dimension: 24x48" (610x1219 mm)



Panel Thickness: 9/16" (14 mm)




UHPC Ultralight Grigio Urbano. Panels 610x1219 mm




UHPC Ultralight Urban Gray. Panels 610x1219 mm

# Size and Monolithic Elements

EasyAir panels are versatile and flexible for various applications, thanks to the numerous standard sizes we produce, including angular variants of monolithic architectural elements, to meet a wide range of aesthetic and functional buildings requirements.

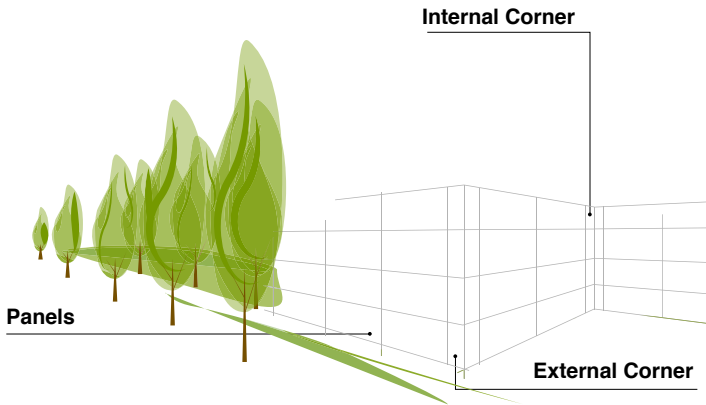


### Natural Air




### UHPC Ultralight




### Panel

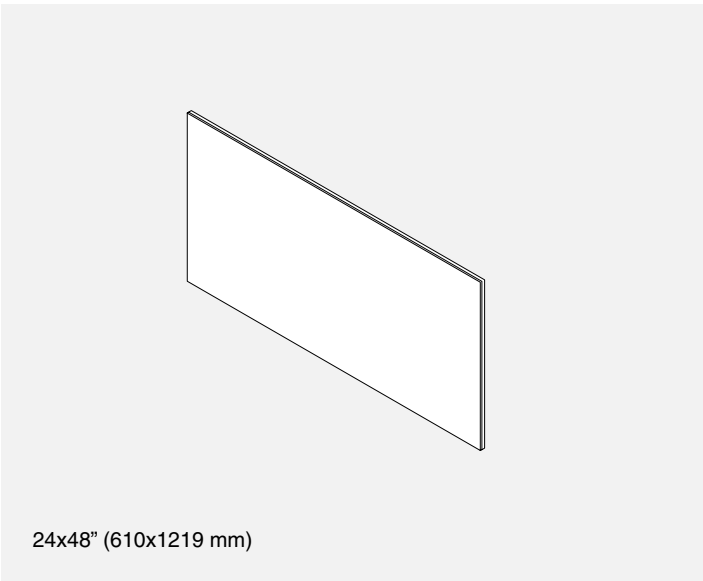

### External Corners

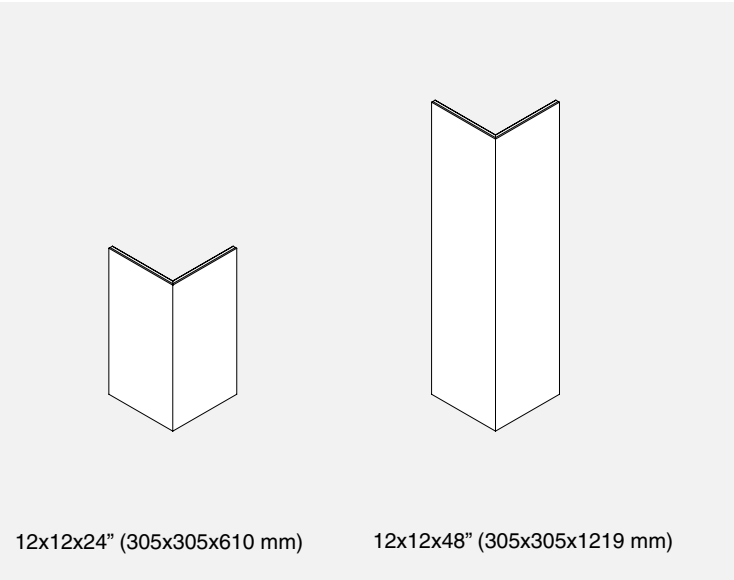

### Internal Corners

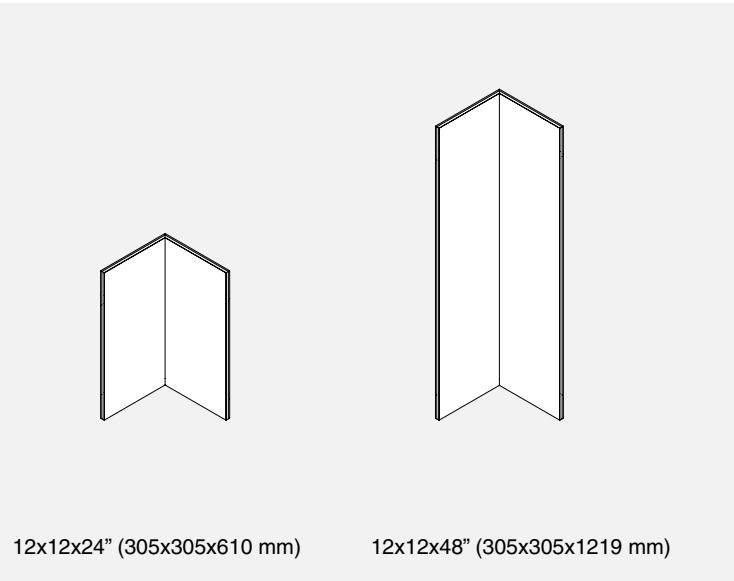

### Panel thickness and weight

**Natural Air**  
Thickness: 43/64" (17 mm)  
Weight: 25 kg/m² (5.1 lb/sqft)



**UHPC Plus Air**  
Thickness: 9/16" (14 mm)  
Weight: 14 kg/m² (2.8 lb/sqft)






# Outdoor System

Thanks to the performance of our system, EasyAir is highly versatile and it is suitable for a wide range of applications. The external installation system includes a plate to connect the panel to the floor and another to link the panels together.







# Outdoor System

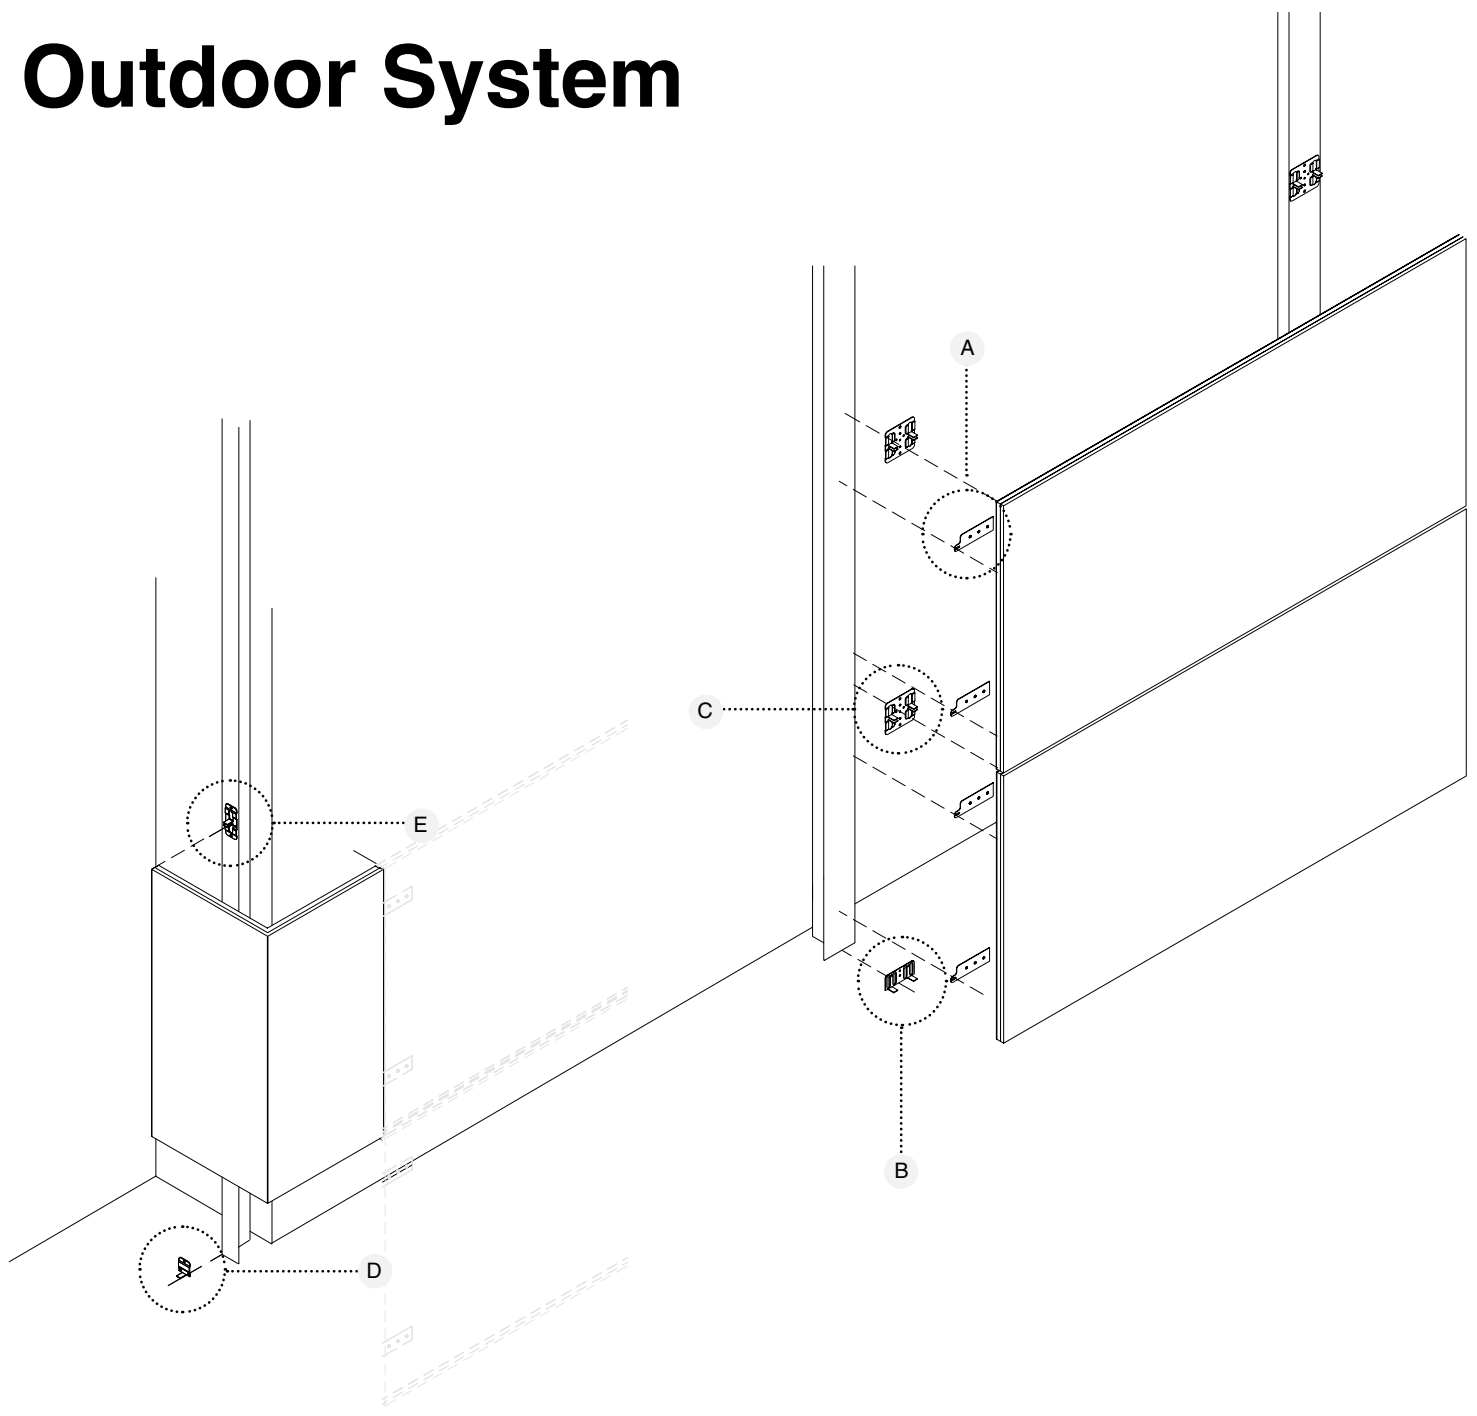

**Kit Anchors**


The external installation system includes a clip, four plates to connect the panel to the floor, and another to connect the panels together.

- A EasyClip
- B Support plate horizontal 2 flaps
- C Support plate horizontal 4 flaps
- D Support plate vertical 1 flap
- E Support plate vertical 2 flaps

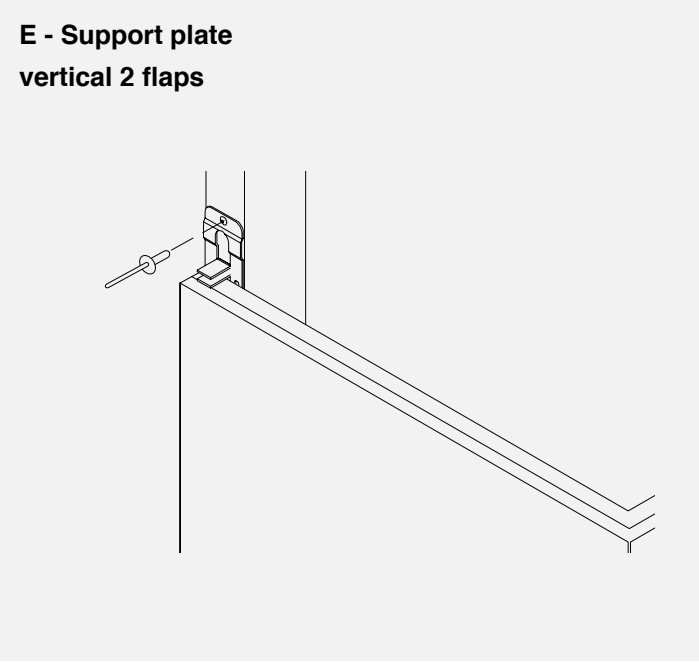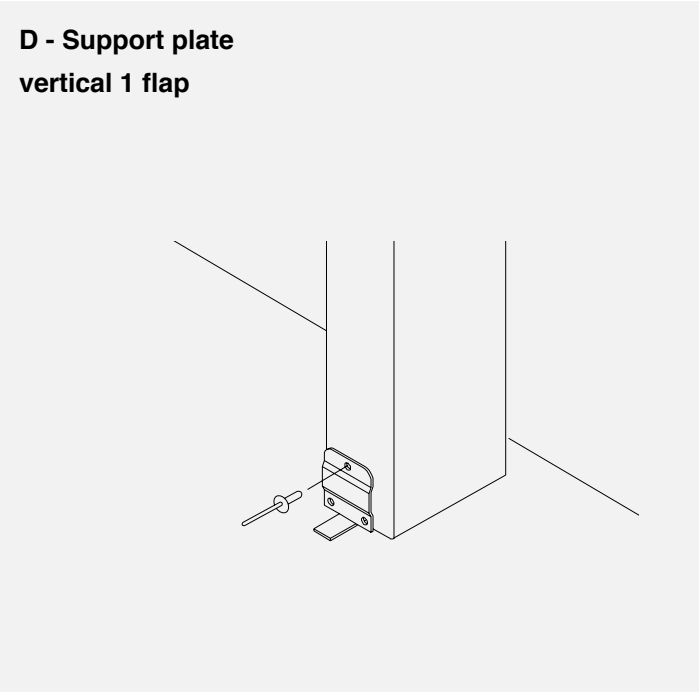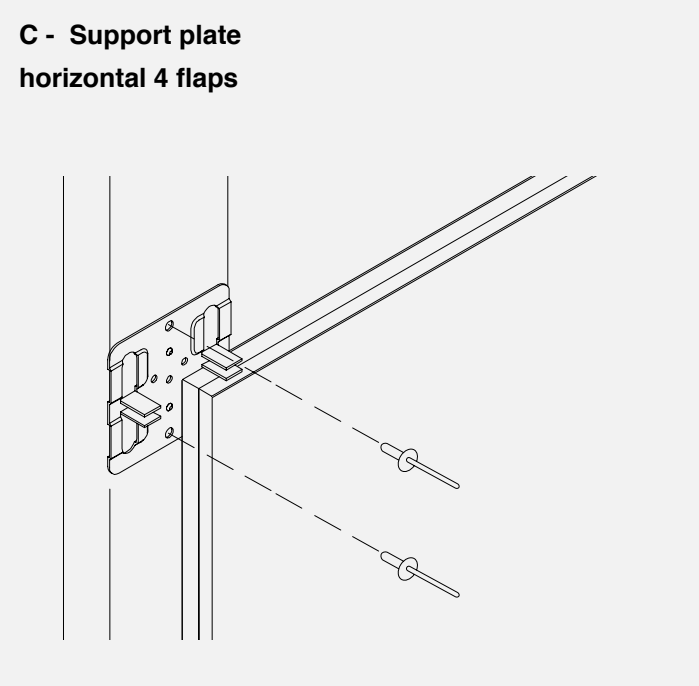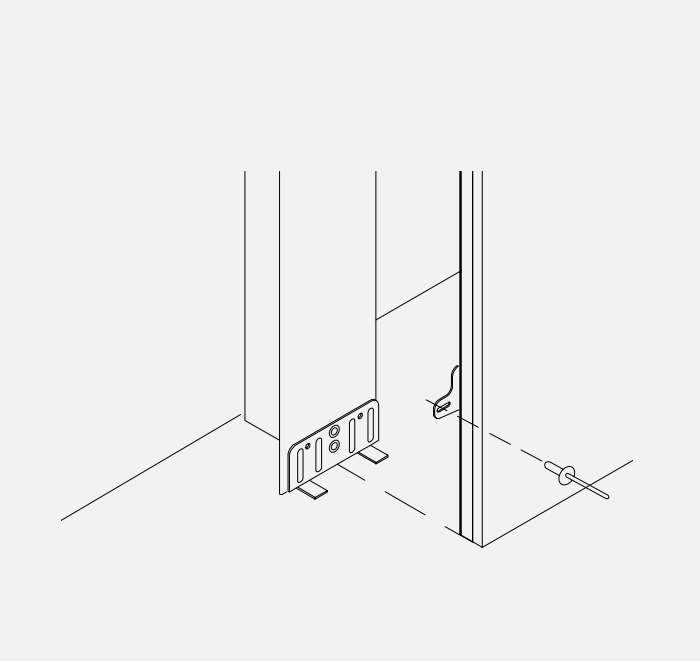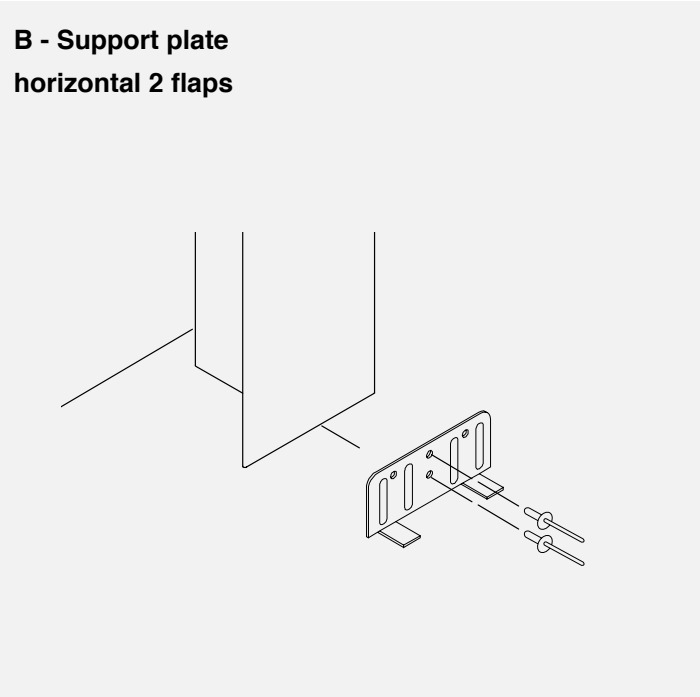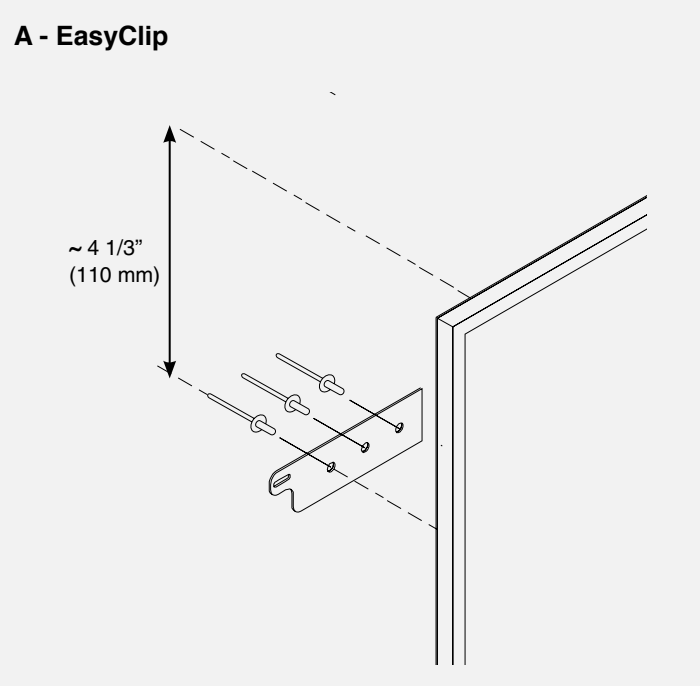




▼ EasyClip

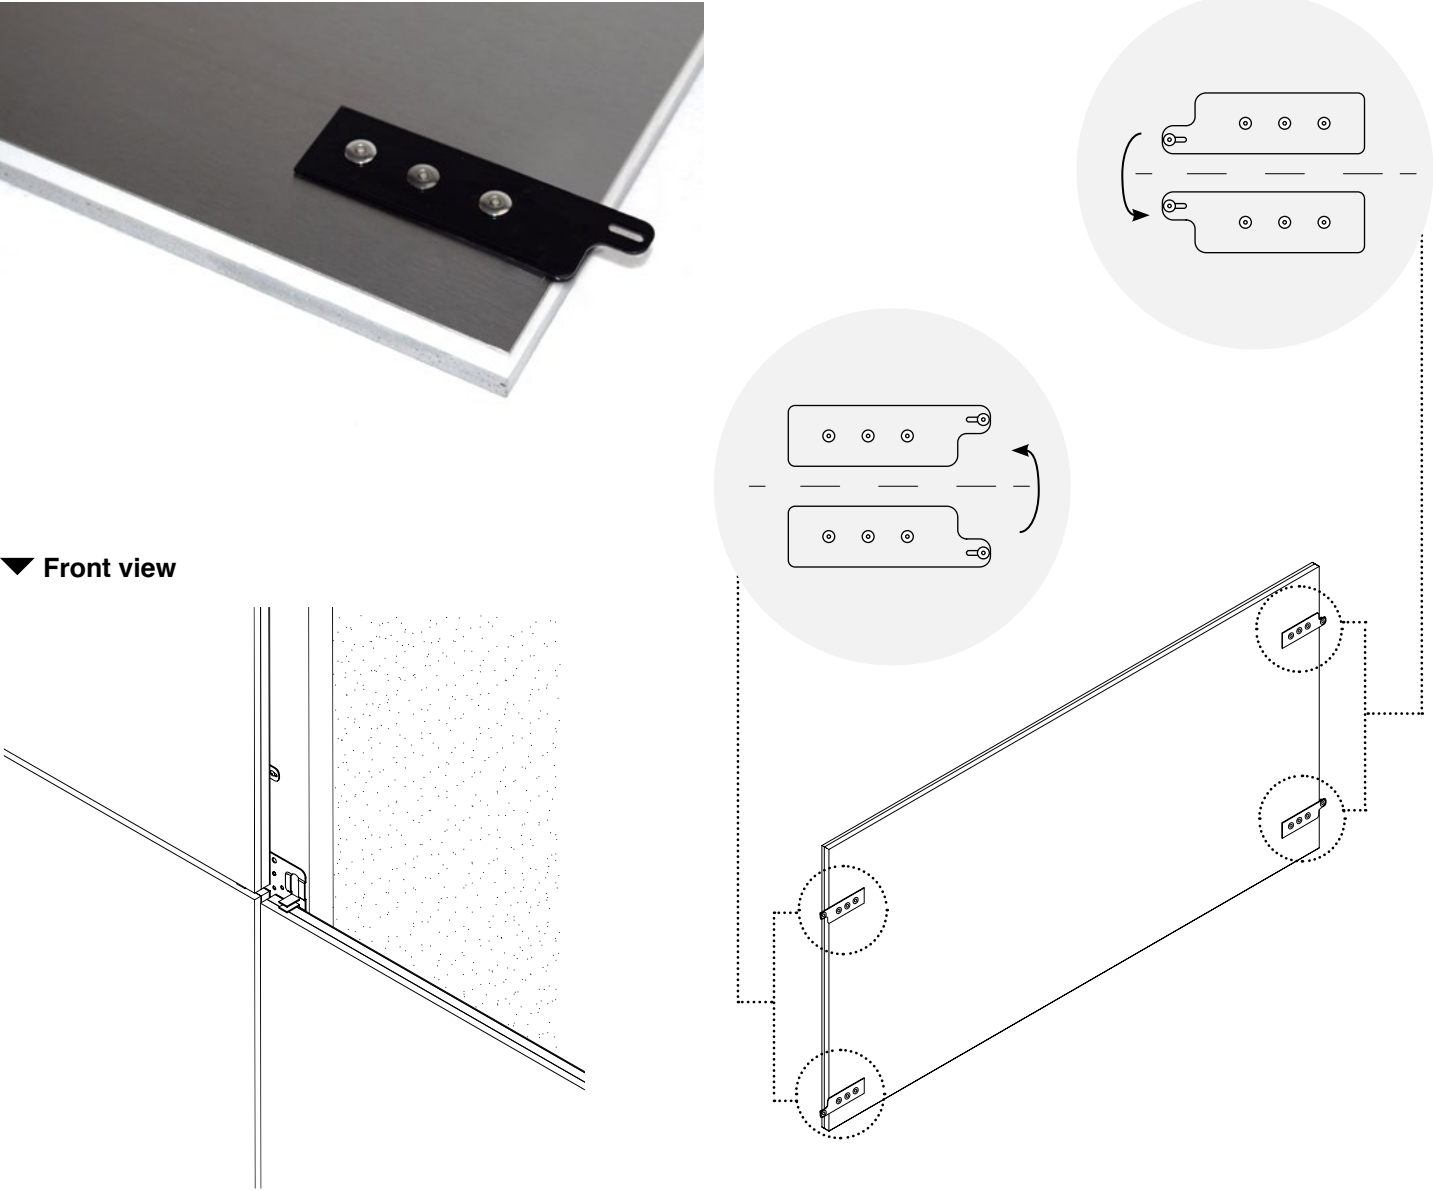


▼ Front view

▼ Back view

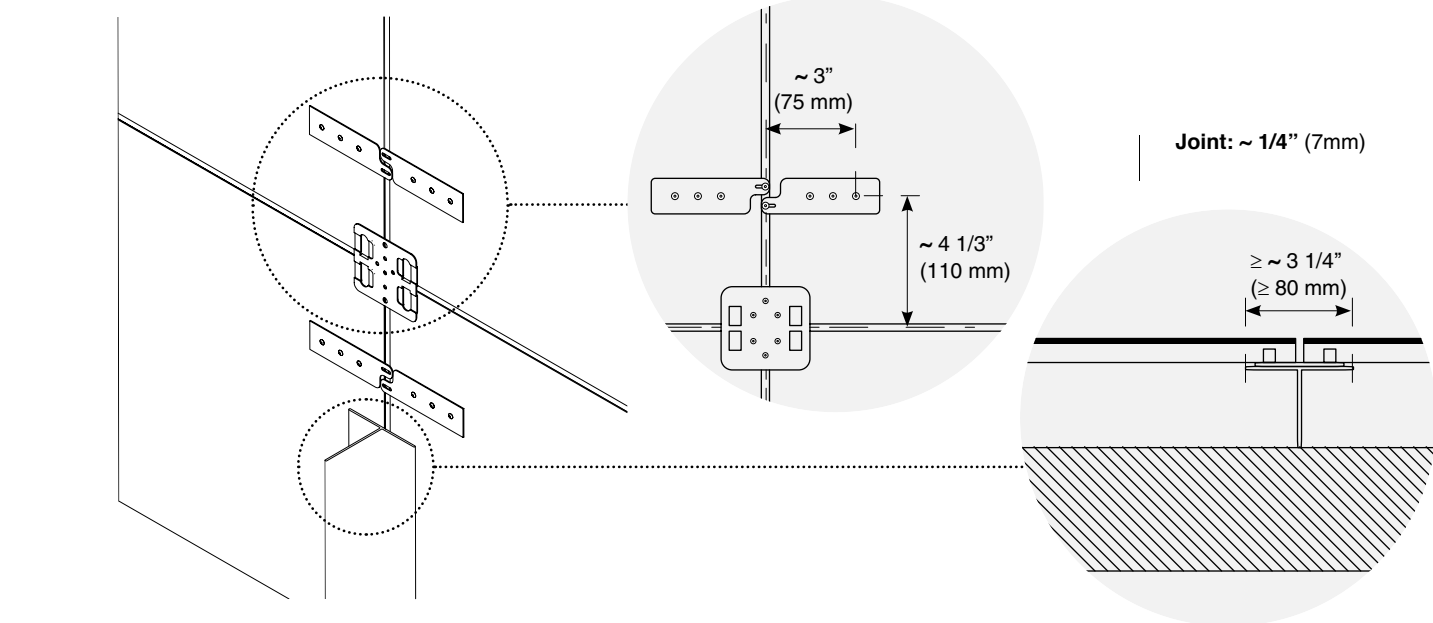


TYPICAL DETAILS


▼ Horizontal Section

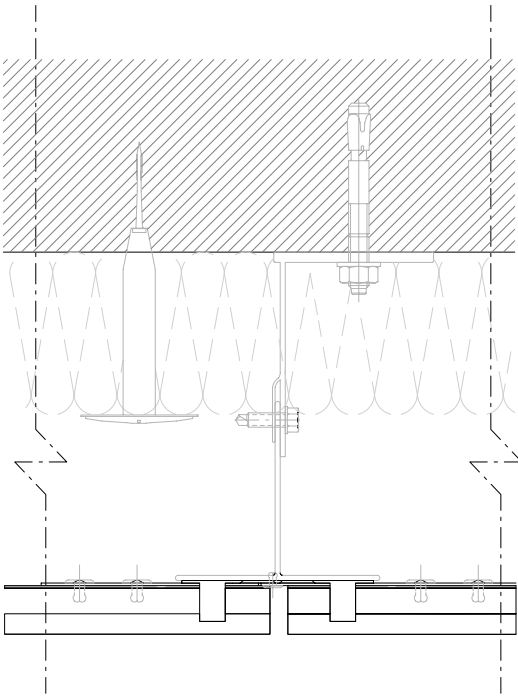


▼ Vertical Section

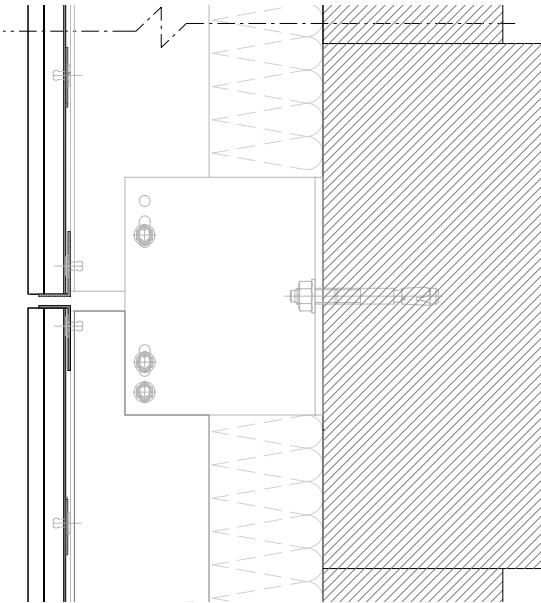

▼ External Corner

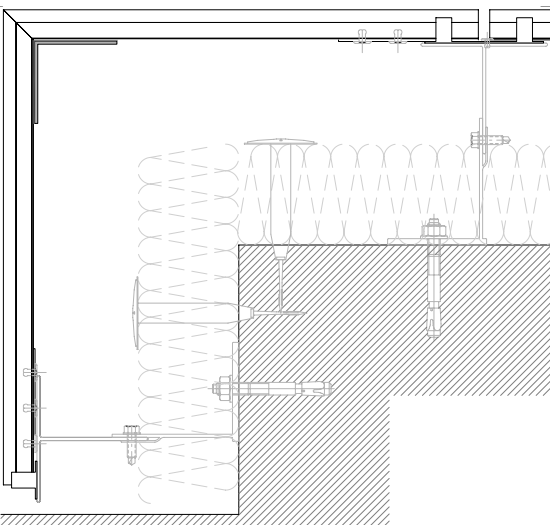


▼ Internal Corner

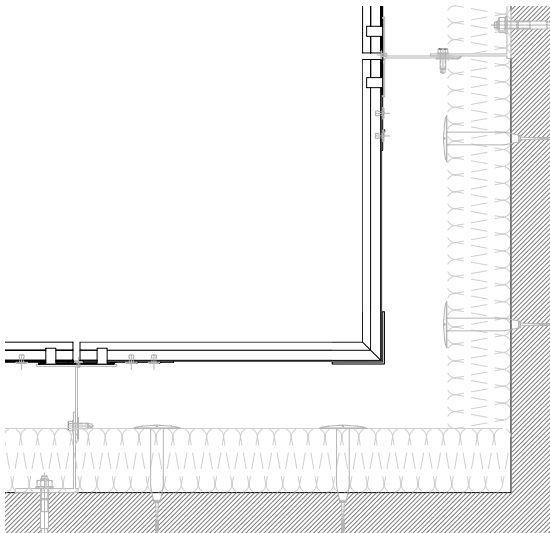


# Installation guide



Horizontal

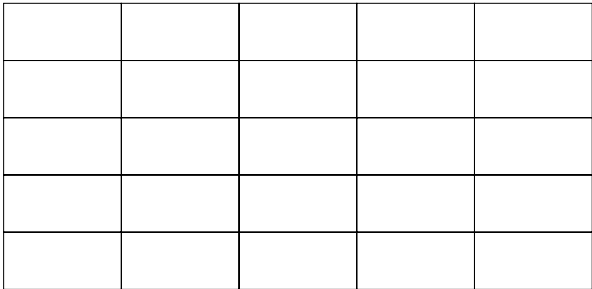


Example

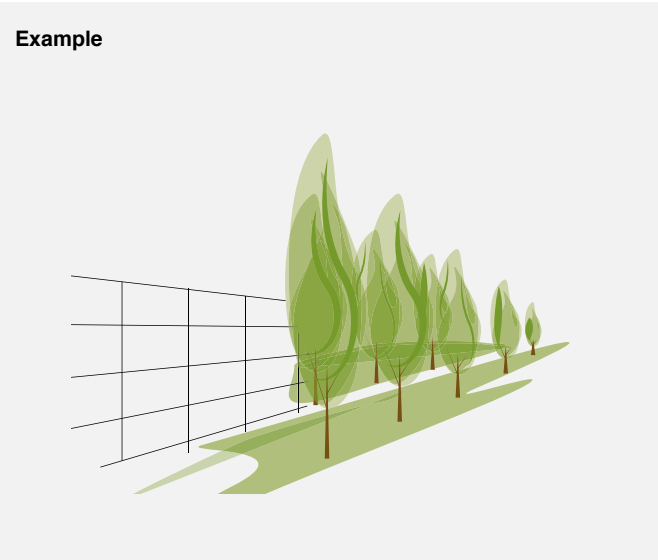


Vertical with misaligned joints


1

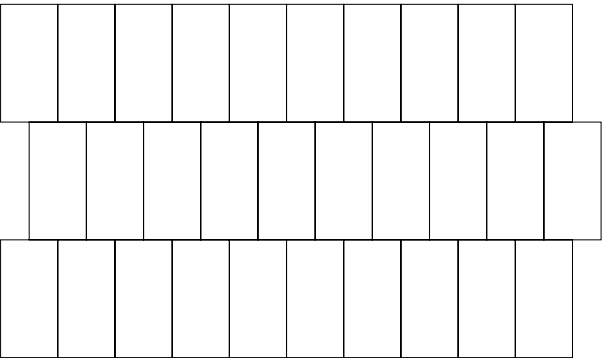


Example

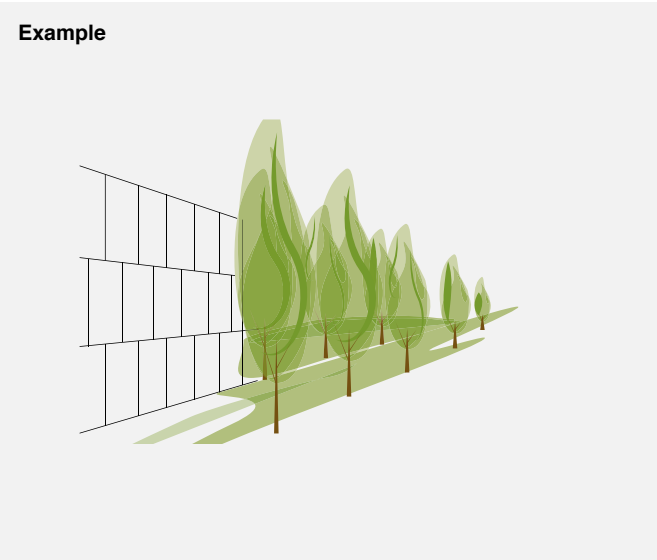


Vertical

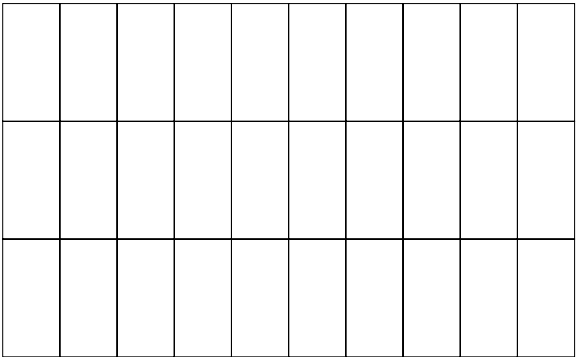


Example

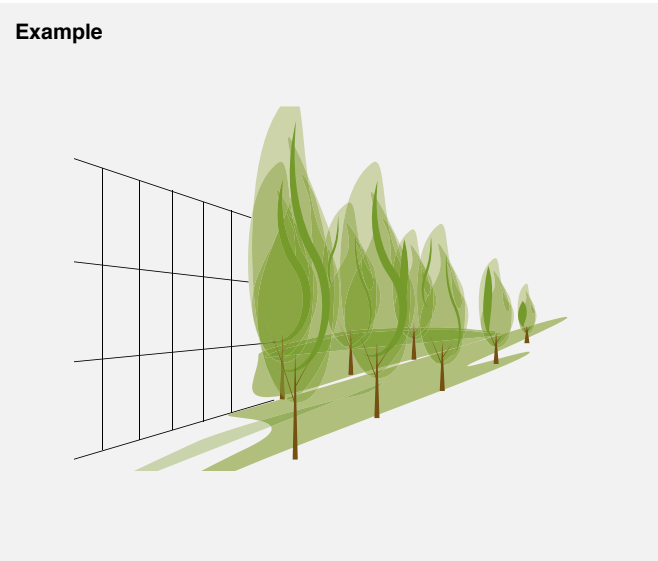


2

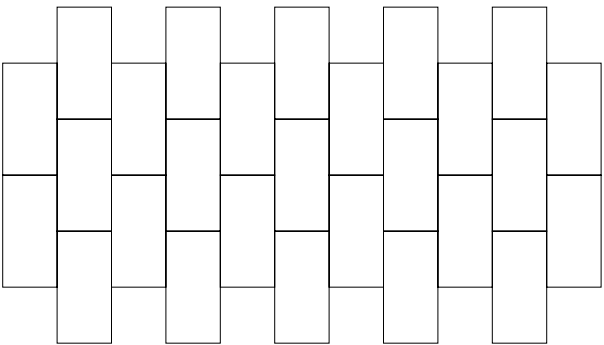


Example

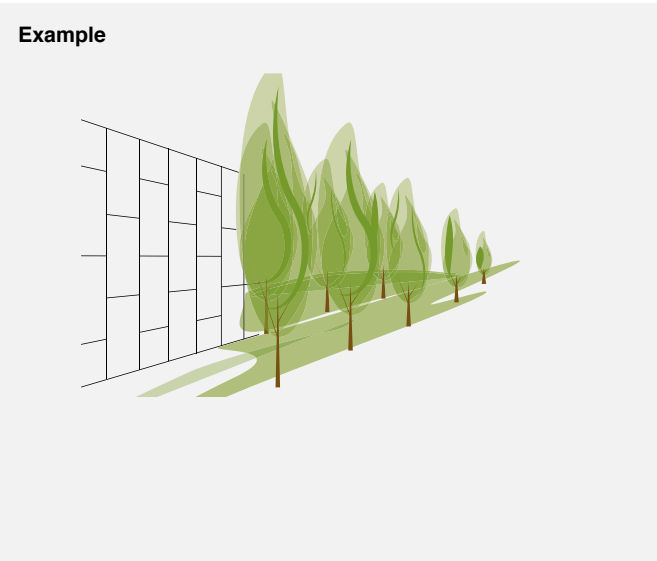


Horizontal with vertical misaligned joints

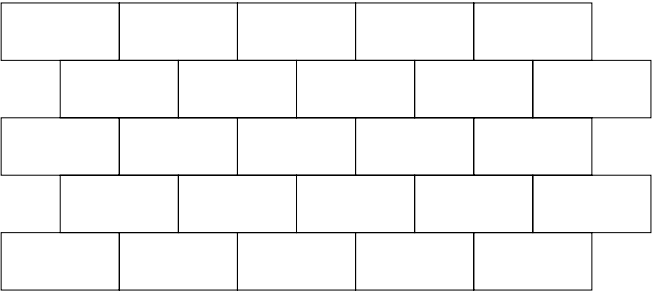


Example

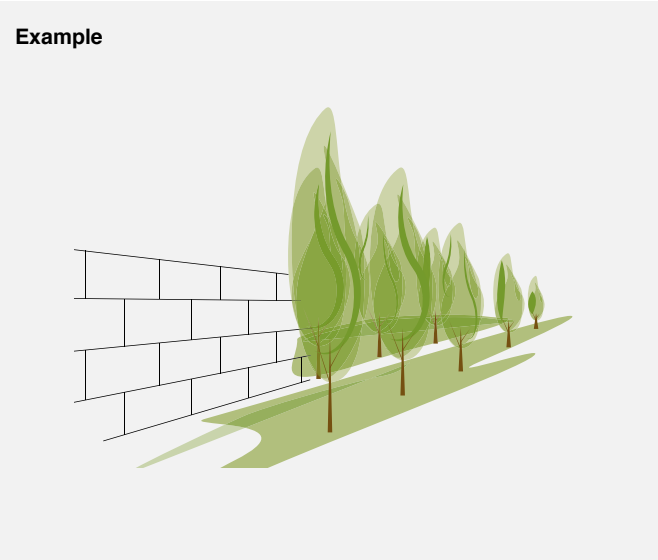


Diagonal

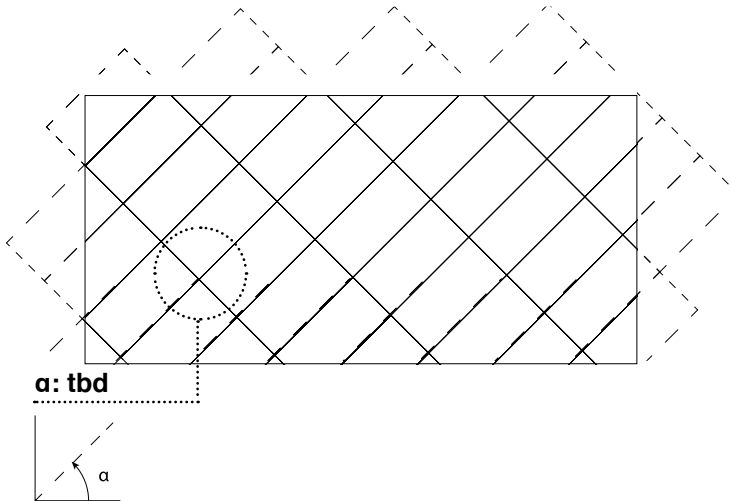

Example

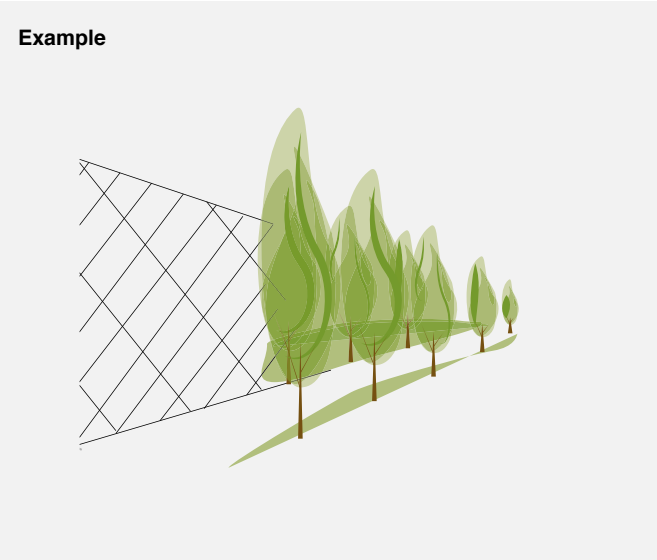


# Advantages

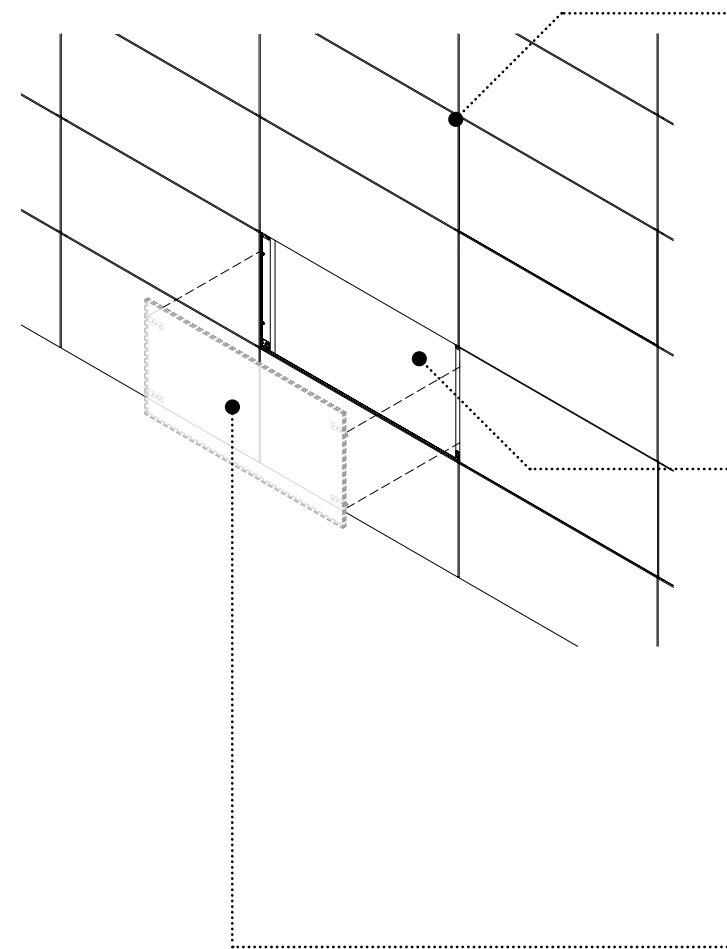


## Perfect alignment of the joints

The alignment of the joints is given and fixed by the use of 'support plates' that uniquely define the joints themselves.





## Non sequential installation

Non-sequential panel installation is possible due to the independent EasyClip fixing system.



## Independent removal

Thanks to the EasyClip fastening system, it's possible to remove the individual panel independently of its position.

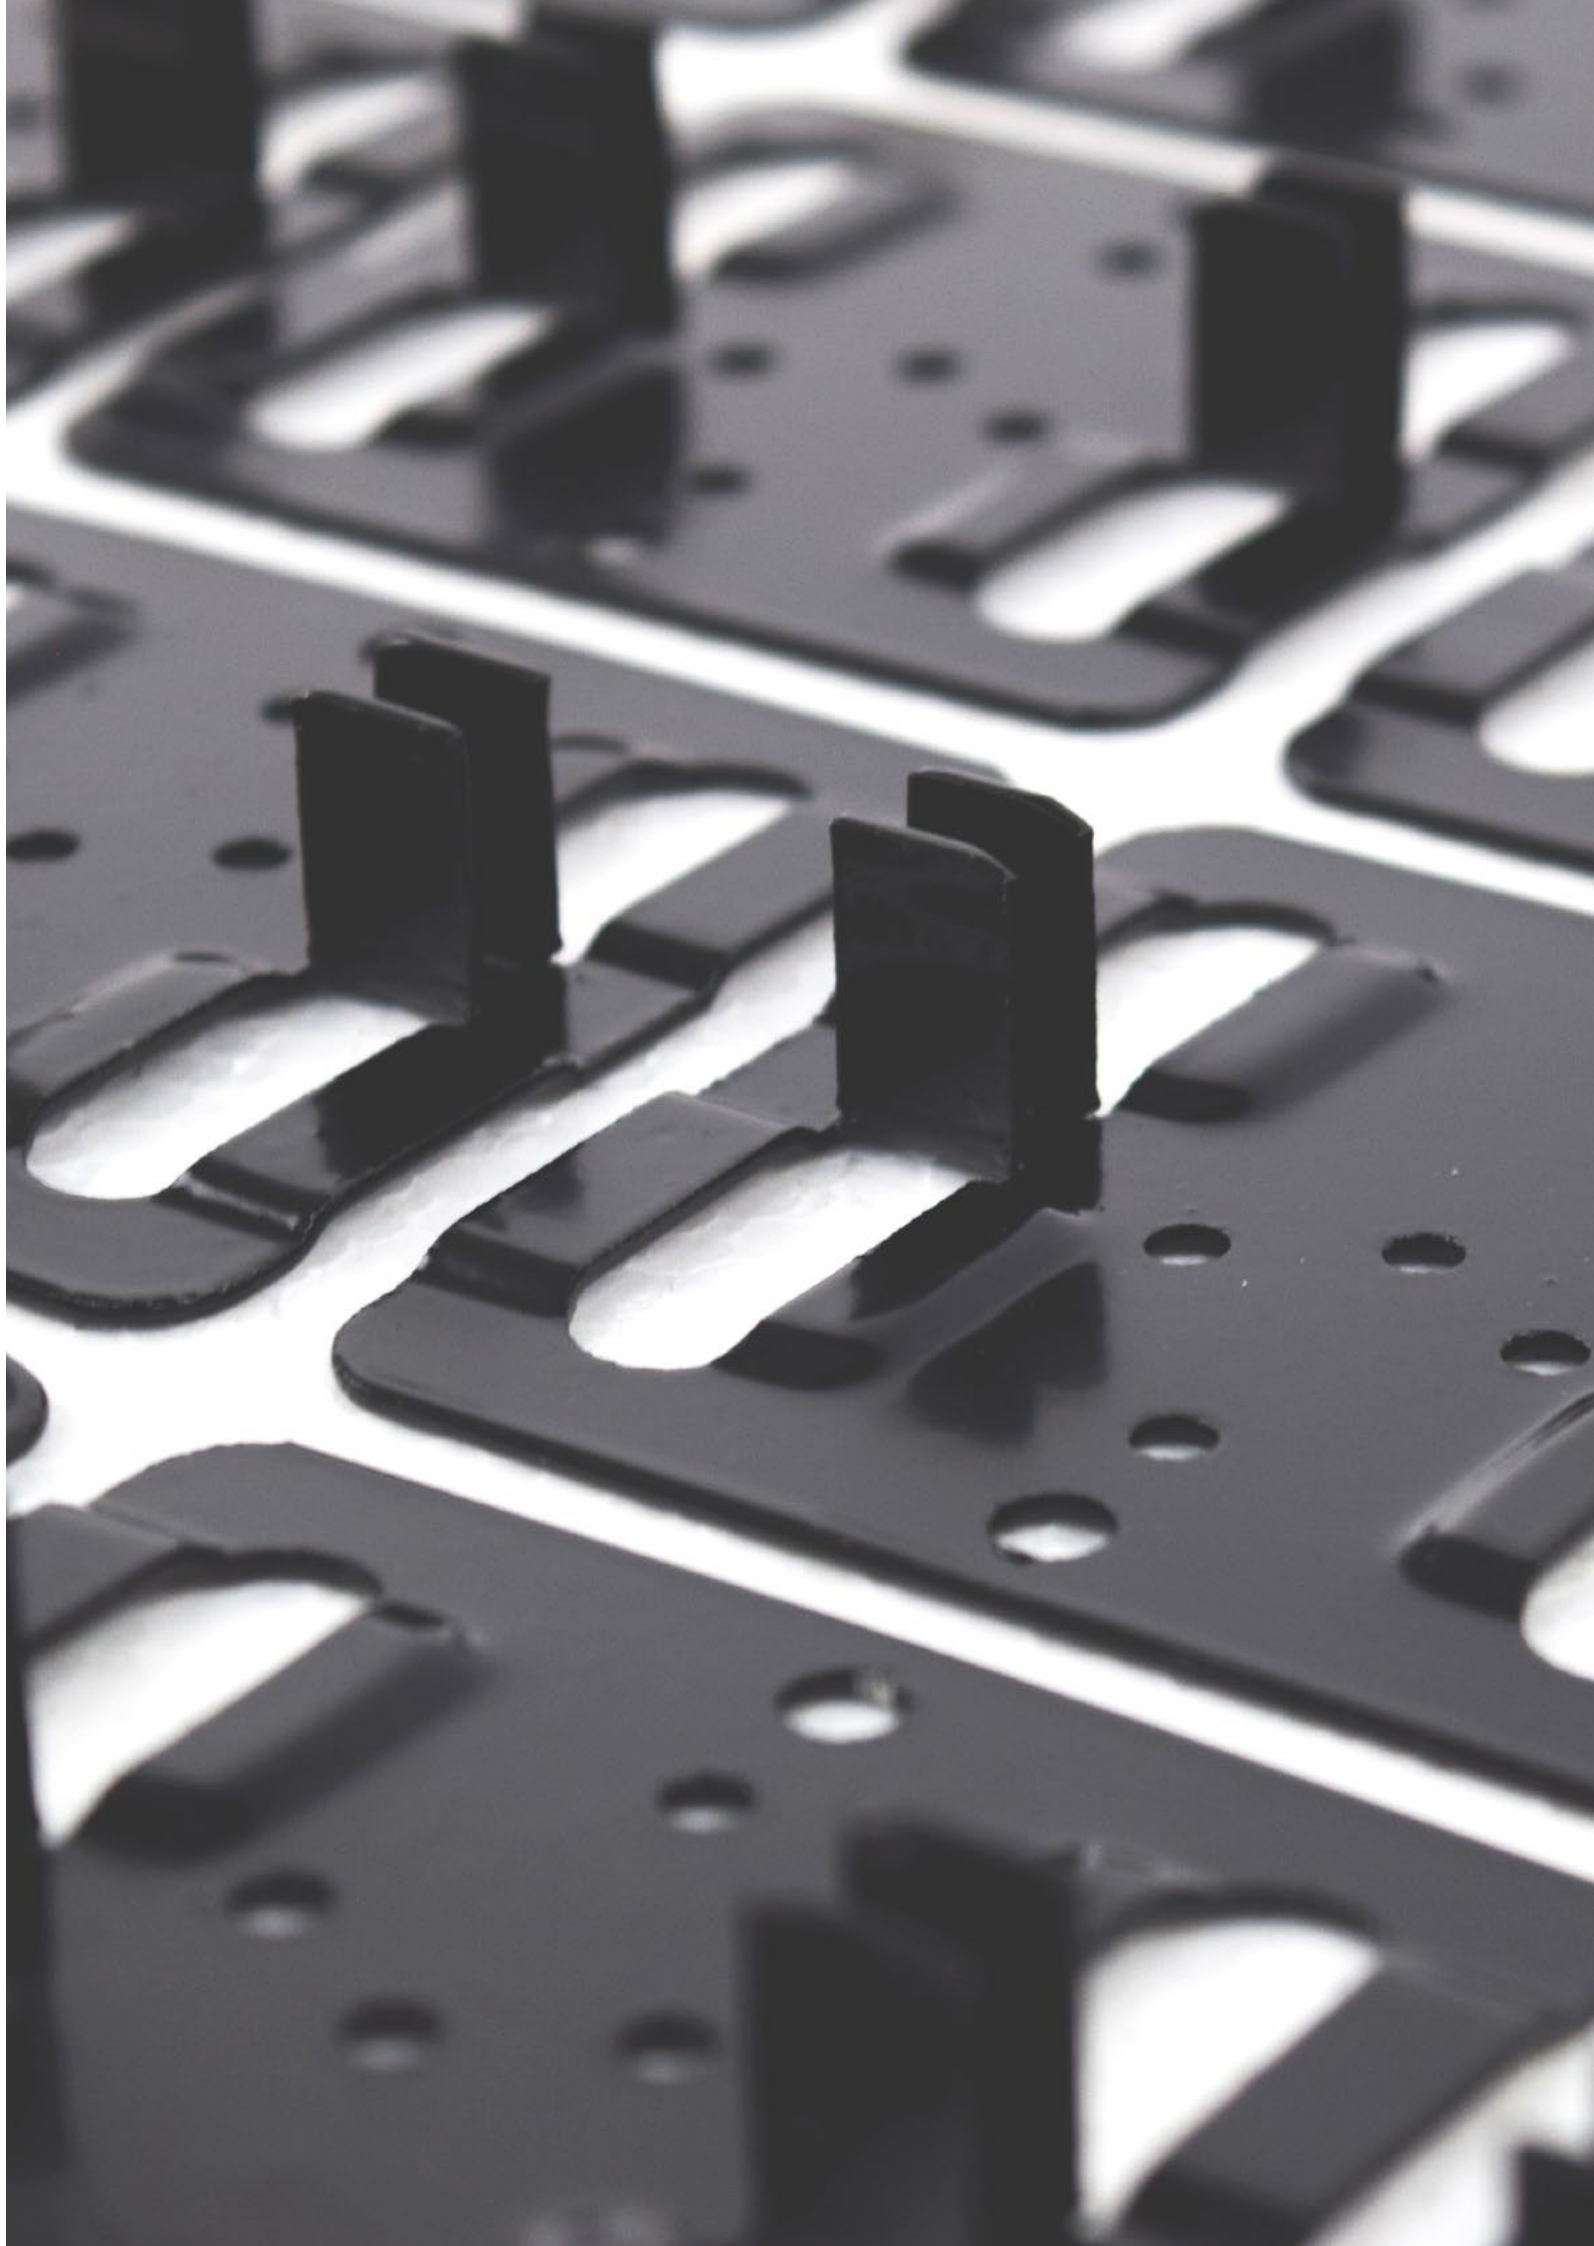




# Indoor System

EasyAir is extremely versatile and is also well-suited for indoor spaces. The indoor installation system features a single plate that attaches directly to the wall using high-strength screws, providing both durability and aesthetic appeal.


# Indoor System

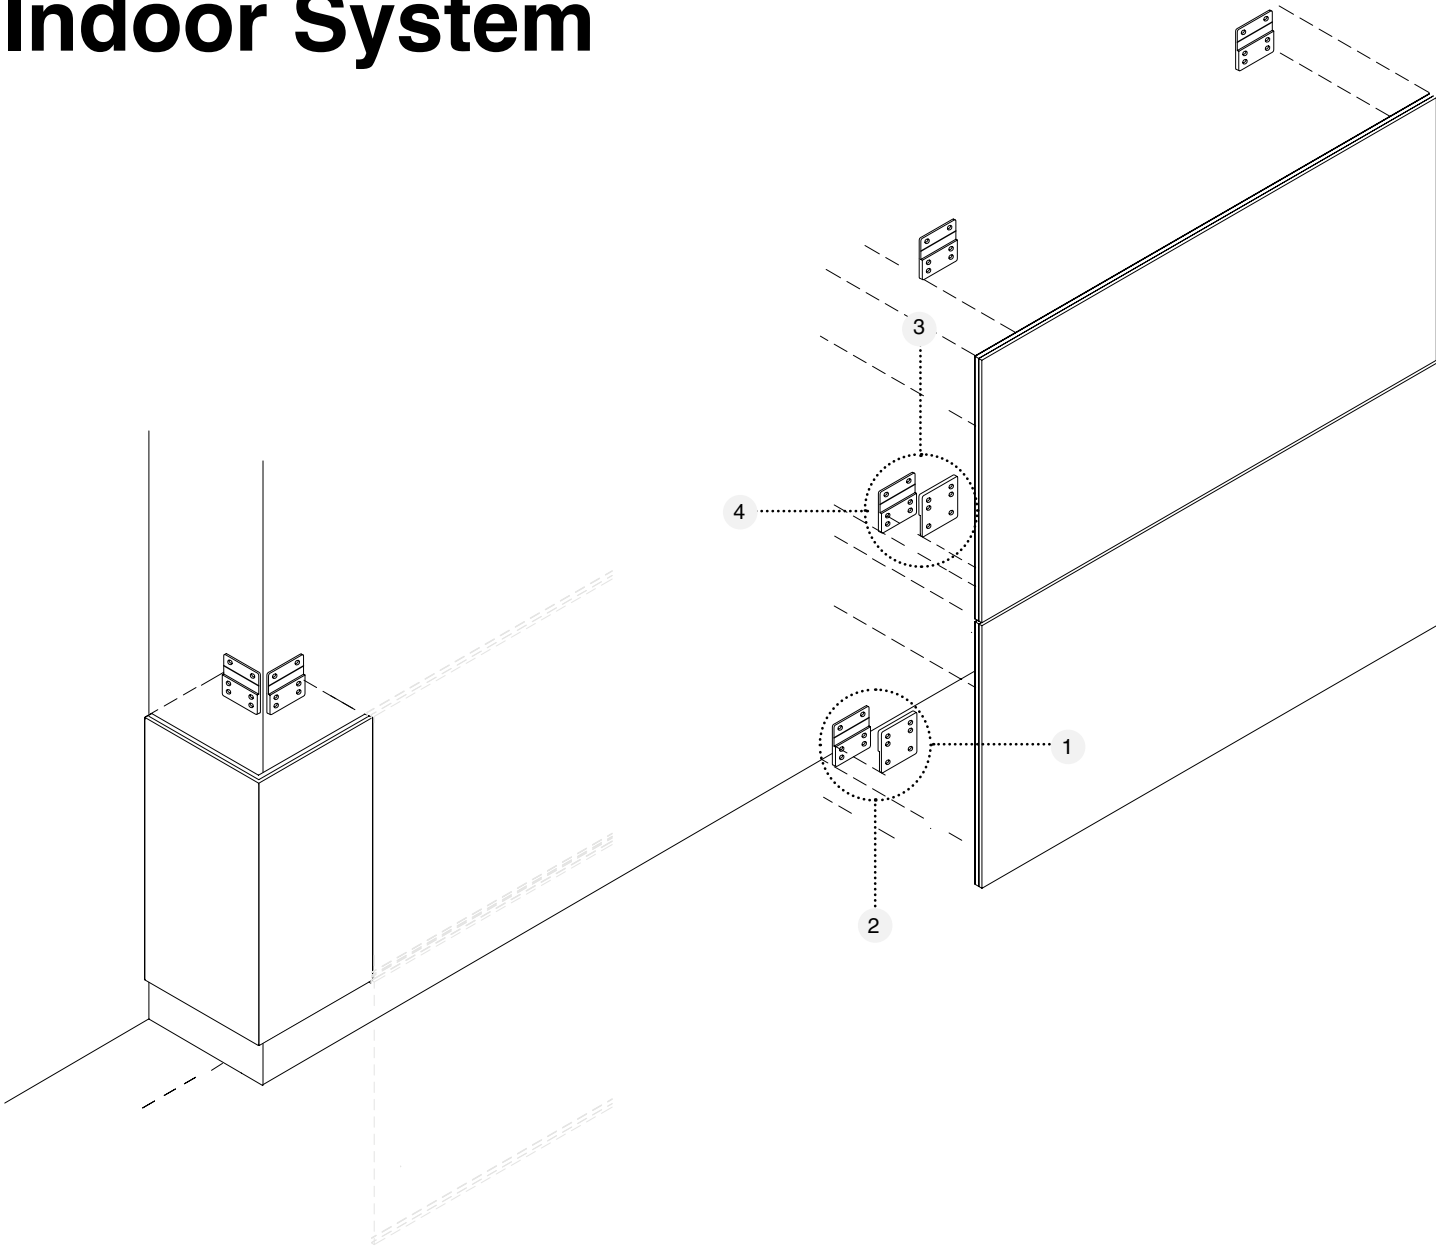


**Kit Anchors**

The indoor installation system features a single plate that attaches directly to the wall using high-strength screws, providing both durability and aesthetic appeal.


EasyPlate




1 - EasyPlate - Base (support wall)

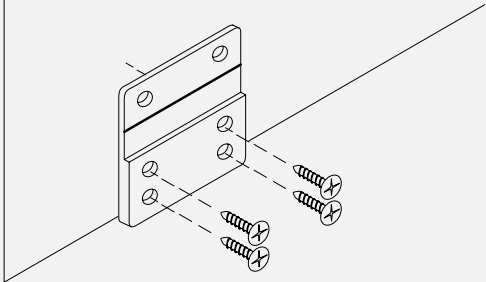


2 - EasyPlate - Base panel

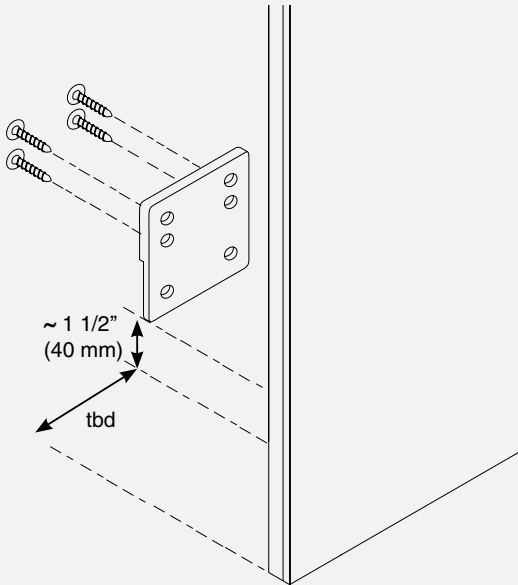

3 - EasyPlate - Panel Top side

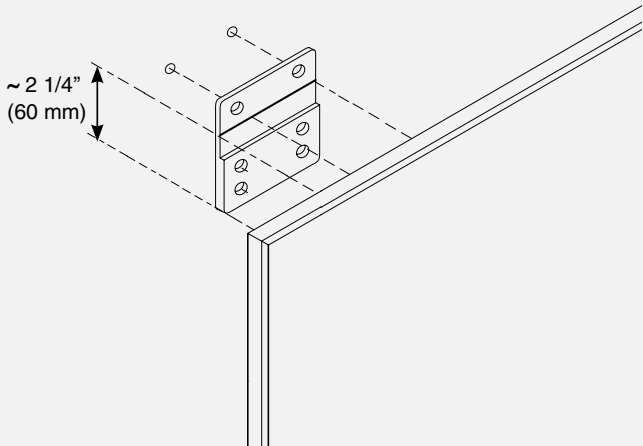


4 - EasyPlate - Panel Bottom side

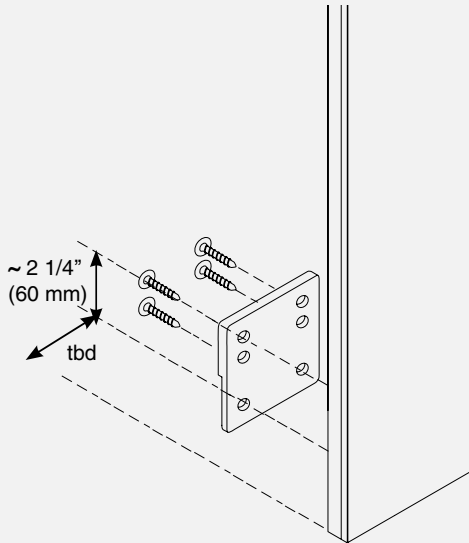


EasyPlate - Panel top side + bottom side





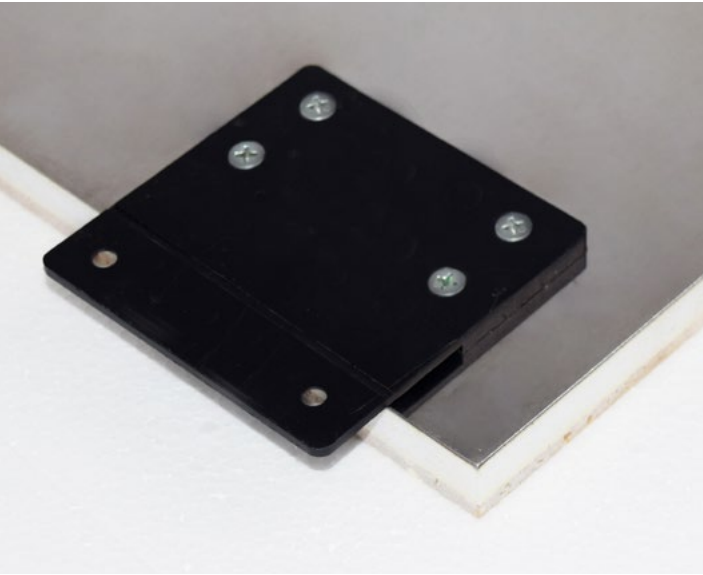

▼ Front view

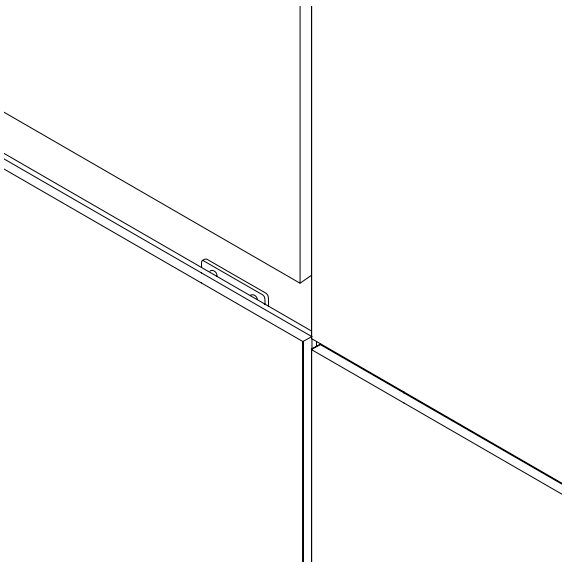


▼ Back view

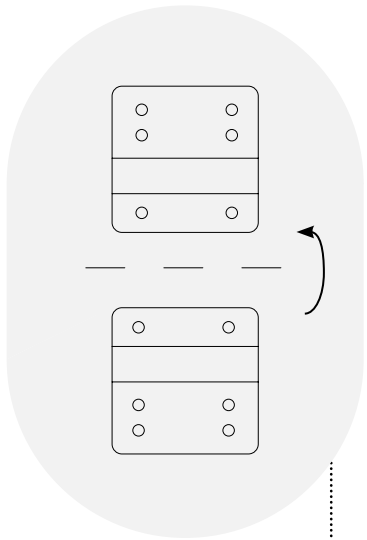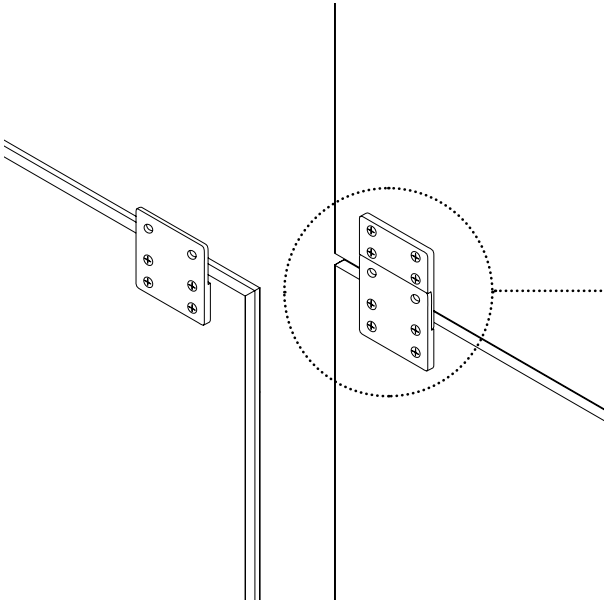


Joint: 1/8" (3 mm)


▼ Vertical Section

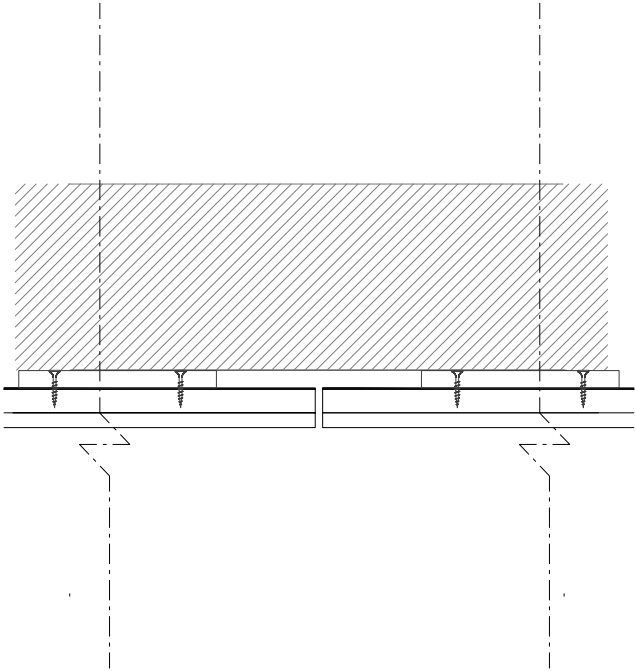


▼ Horizontal Section

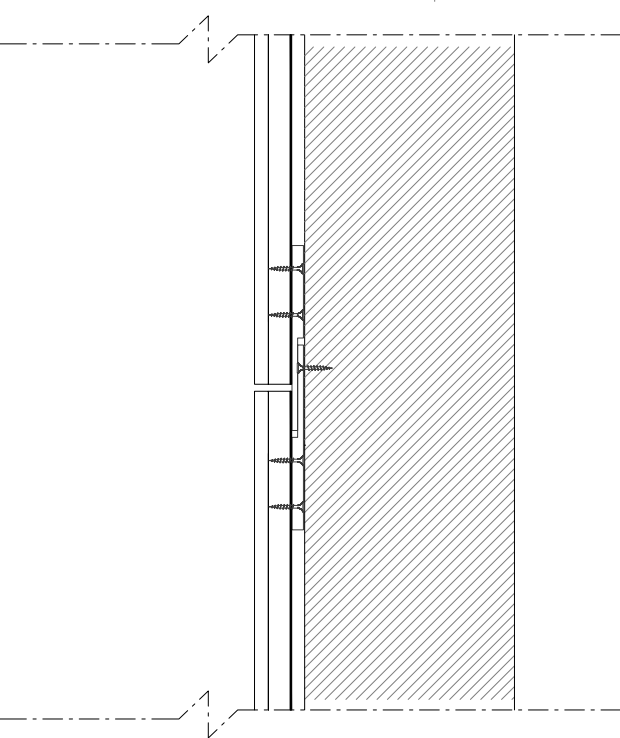

▼ External Corner

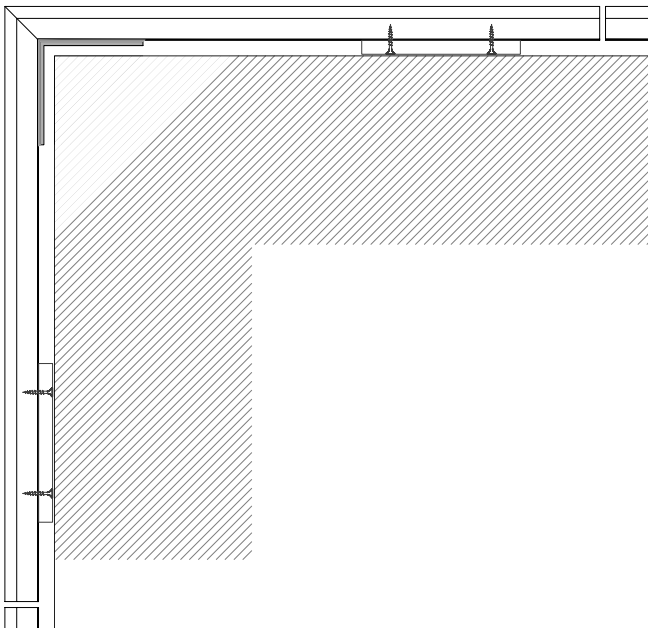


▼ Internal Corner

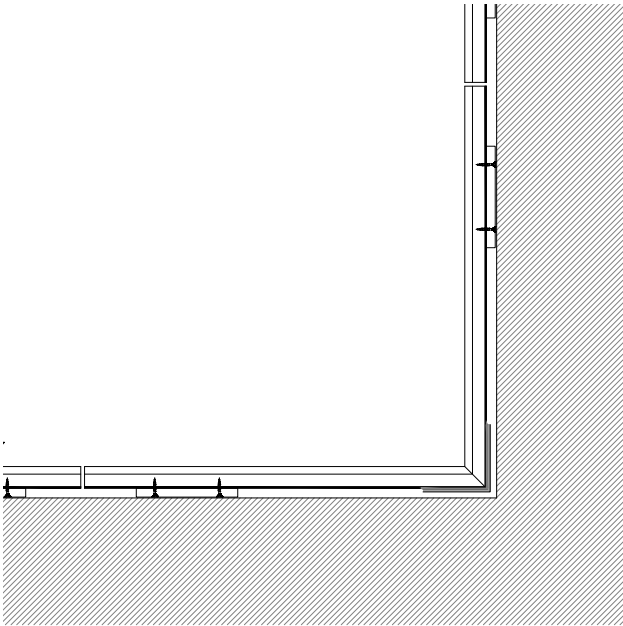


# Processings. Manual Cutting

The Advantages of this type of cutting consist in the manufacturing facility and in the possibility of making cuts during the installation phase.

## CUT TO SIZE

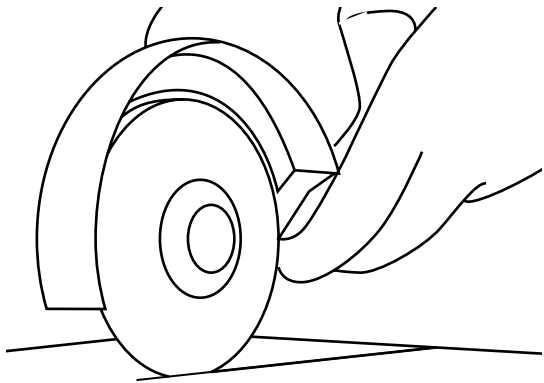


▼ 1  
Cut the back of the panel using a steel cutting disk.

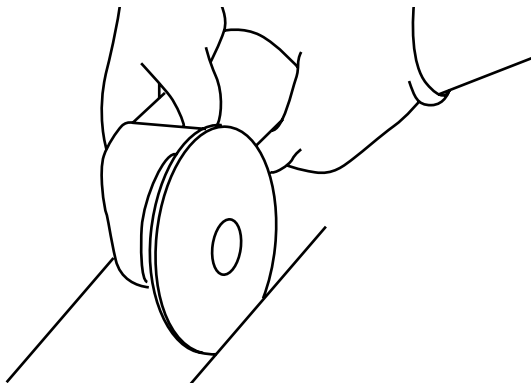


▼ 2  
Cut the surface using a diamond blade mounted on an electric manual grinder.

**Caution:** It is necessary to proceed with high rotation speeds (> 10000 rpm) and low feed rates (< 1m/ min). Depending on the type of disk and on the length of the cut it may be necessary to water-cool the disc itself.

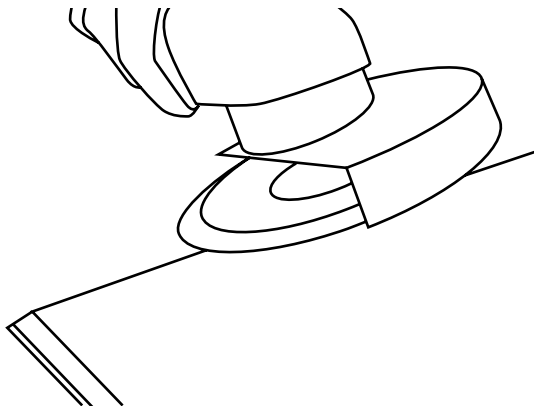


► 3 Fettle steel using a grinder.

## DRILLING

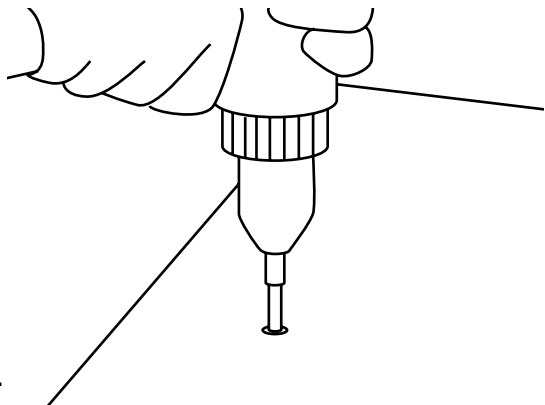


▼ 4  
For manual drilling you can use tungsten bits up to a 5 mm diameter mounted on electric drills or cordless screwdrivers.

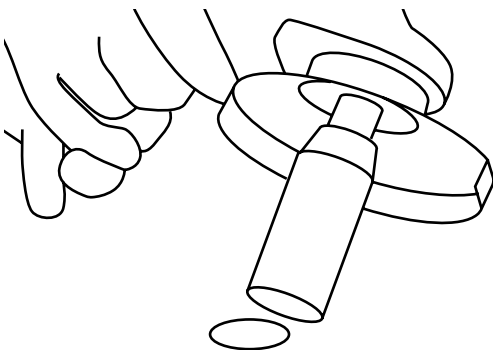


▼ 4.1  
As an alternative it is possible to use cup cutters (or core drills) mounted on grinders, electric drills or cordless screwdrivers.


## INTERNAL CUT

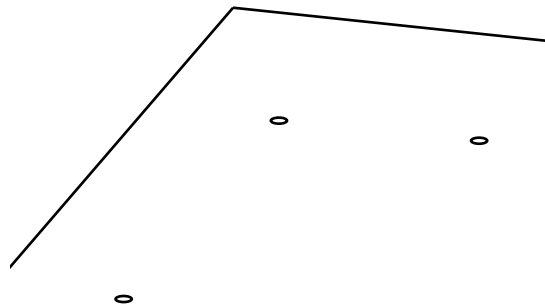

▼ 5  
For the realization of internal and “L” cuts it is recommended to round the opening vertices using bits with a radius of at least 5mm to reduce the risk of breakage. Then proceed with the cutting using diamond disks, making sure to stop the feed once the previously created hole has been reached. Follow the instructions mentioned earlier for drilling and cutting with diamond discs.

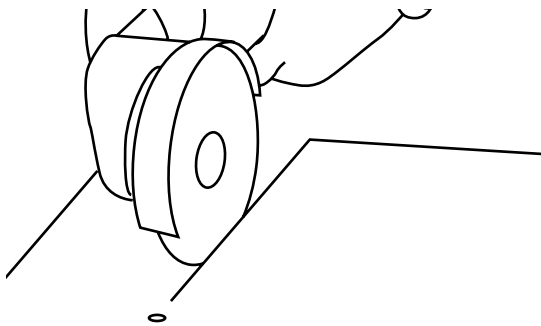

## EDGES FINISH

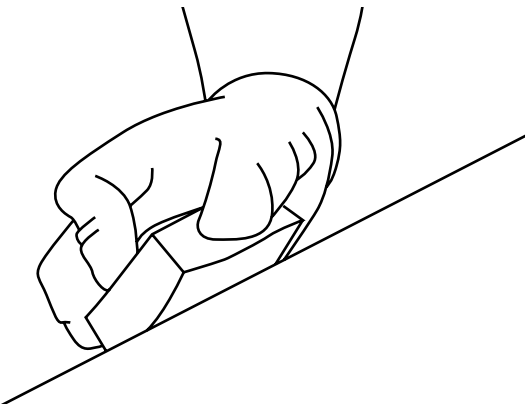


► 6  
The edges can be finished manually using diamond sponges or sandpaper. A light pass on the side of the panel can achieve a chamfered edge effect, or with repeated passes, a beveled effect.

The last generation machines ara capable of increasing the quality standards of products, reducing the environmental impact.

CUT TO SIZE

▼ 1


EasyAir, in all its variants, can also be cut using water-jet machines. We recommend an operatinh speed between 2 and 3m/min

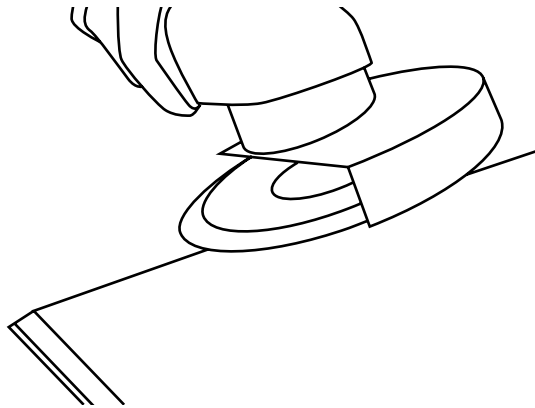

▼ 2 Fettle steel with a grinder.

▼ 1.1


EasyAir, in all its variants, can also be cut using diamond disks. The discs should be designed for marble or UHPC and be in good conditions. It is recommended to proceed with high rotation speeds (> 2000 rpm) and a feed speed between 0.5 and 1m/ min. Depending on the type of disk and on the length of the cut it may be necessary to water-cool the disc itself. It is also recommended to reduce the rotational speed when the tool enters and exits the panel.

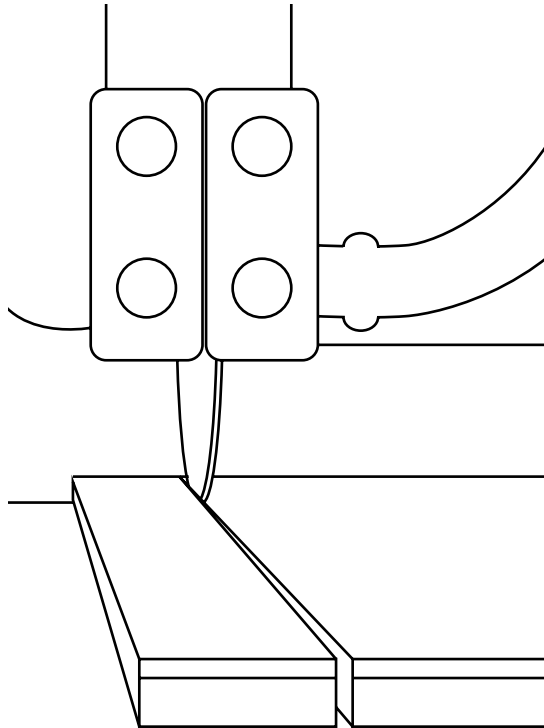

DRILLING


▼ 3

EasyAir, in all its variants, can also be drilled using CNC machines. A preliminary hole should be made using a diamond point, then, if necessary, use a milling machine to enlarge the hole to the required dimensions. Use a bit with a diameter between 4 and 8mm. The operating speed is 4mm/ min, with a mandrel rotation of 900 rpm. When using these tools, it is advisable to: cool the point of contact with water, start drilling at a low rotational speed, adjusting the pressure based on the resistance offered by the type of EasyAir being worked on.

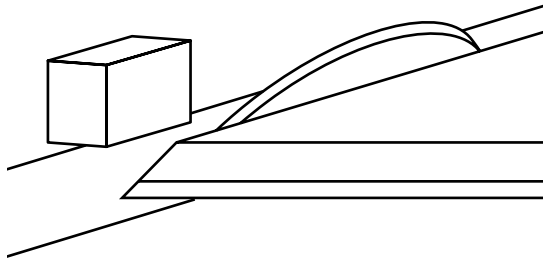

▼ 3.1

Easy Air, in all its variants, can also be drilled using water-jet machines. Water-jet cutting allows for holes of smaller diameter compared to those achievable with CNC machines. The operating speed should be between 2 and 3m/ min.

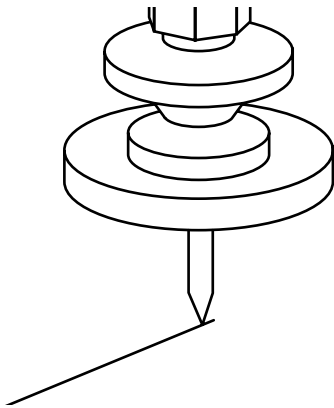

► 4

To make a 45 ° cut, you can use diamond disks inclined at 45°. In this way it is possible to create a corner with two slabs of EasyAir, in all its variants. The new edge should then be chamfered. Numerous types of edge finishing can be obtained using different wheels. The operating speed should be tested beforehand.




# Services




## Shop Drawings

GammaStone with its skilled technical team provides professional and detailed shop drawings.



## BIM

You can download BIM models from our website to include in project modeling.




## Cutting List

The installer is also provided with a list of panels that need to be cut on-site.



## BOM

For each project, the Bill of Material is provided, including both panels and all installation accessories.



## Technical details

The technical details are provided for every project, such as the window returns, the starting and finishing panel details (first and last floor).



## Static analysis

A static analysis is prepared, and upon request, the PE stamp can also be provided.

# Certifications

GammaStone holds ISO 9001 certification issued by IMQ, the most important Italian certification body and a European leader in safety, quality, and sustainability testing and laboratory assessments.

Our products represent a combination of visual impeccability, technical excellence, and design quality. Their reliability and aesthetic perfection are accredited by significant international certifications.

All GammaStone Air panels have undergone rigorous testing required by the EOTA (European Organisation for Technical Approvals) following the ETAG guidelines and conducted by the Giordano Institute. They have proven to be extremely safe and suitable for application even in extreme weather conditions.



## Natural Air

| FIRE TESTS                                                         | DESCRIPTION                                                                      | VALUE                                                                        |
|--------------------------------------------------------------------|----------------------------------------------------------------------------------|------------------------------------------------------------------------------|
| UNI 9177:2008<br>UNI 8457:2010<br>UNI 9174:2010                    | Reaction to fire                                                                 | Classe 1                                                                     |
| UNI EN 13501-1:2009<br>UNI EN 13823:2010<br>NI EN ISO 11925-2:2005 | Fire classification                                                              | B - s1, d0                                                                   |
| ASTM E 84 (UL 723)                                                 | Surface burning characteristics                                                  | Class A                                                                      |
| ASTM E136                                                          | Behavior of materials at 750°C (1382°F)                                          | Non-combustible                                                              |
| CAN/ULC-S114<br>ASTM E1530:2006                                    | Test for Non-Combustibility                                                      | Non-combustible                                                              |
| NFPA 285                                                           | Fire test                                                                        | Passed                                                                       |
| BS8414-1                                                           | Fire test                                                                        | Passed                                                                       |
| AS/NZS 1530                                                        | Determination of ignitability, flame-propagation, heat release and smoke release | Ignitability 0<br>Spread of flame 0<br>Heat Evolved 0<br>Smoke developed 0-1 |

| AMERICAN TESTS     | DESCRIPTION                                                                       | VALUE         |
|--------------------|-----------------------------------------------------------------------------------|---------------|
| ASTM C393/C393M-16 | Core Shear Properties (Negative Windload - Machine Direction)                     | 102,4 psi     |
|                    | Core Shear Properties (Positive Windload)                                         | 18,7 psi      |
|                    | Core Shear Properties (Negative Windload - Crosswise Direction)                   | 100,2 psi     |
| ASTM C272/C272M-18 | Water Absorption of Core Materials                                                | 6,143 ibm/ft³ |
| ASTM C880/C880M-18 | Flexural Strength Evaluation (Negative Windload - Dry Condition) Initial Failure  | 1.043 psi     |
|                    | Flexural Strength Evaluation (Negative Windload - Dry Condition) Ultimate Failure | 2.932 psi     |
|                    | Flexural Strength Evaluation (Positive Windload - Dry Condition)                  | 2.787 psi     |
|                    | Flexural Strength Evaluation (Negative Windload - Wet Condition)                  | 891 psi       |
|                    | Flexural Strength Evaluation (Positive Windload - Wet Condition)                  | 2.903 ps      |
| ASTM C482-02       | Bond Strength Mitered Corner Joint Assembly Shear Loading Evaluation              | 992,4 lb      |
| ASTM C297/C297M-16 | Flatwise Tensile Bond Strength Evaluation (Fiberglass Mesh)                       | 359 psi       |
|                    | Flatwise Tensile Bond Strength Evaluation (Foam Core)                             | 190 psi       |
|                    | Flatwise Tensile Bond Strength Evaluation (Steel)                                 | 57,6 psi      |

| EUROPEAN TESTS           | DESCRIPTION                                                  | VALUE                    |
|--------------------------|--------------------------------------------------------------|--------------------------|
| ETAG 004:2013            | Heat-Rain 80 cycles                                          | No faul                  |
| ETAG 004:2013            | Heat-Cold 5 cycles                                           | No faul                  |
| UNI EN ISO 10545-8:2014  | Determination of linear thermal expansion                    | 6.6*<br>(<0.3 mm/600 mm) |
| UNI EN 772-14:2003       | Determination of moisture movement                           | 0.4 mm/m                 |
| UNI EN ISO 10545-4:2012  | Determination of modulus of rupture and breaking strength    | 2.8± 0.3 N/mm²           |
| UNI EN ISO 10545-4:2012  | Breaking strength Heat-Rain 80 cycles + Heat-Cold 5 cycles   | 5.0± 0.5 N/mm²           |
| Rif. Test Certimac POI   | Determination of bond strength by pull-off                   | 1.15 ± 0.26 N/mm²        |
| Rif. Test Certimac POI   | Bond strength after Heat-Rain 80 cycles + Heat-Cold 5 cycles | 1.01 ± 0.31 N/mm²        |
| Rif. Test Certimac POI   | Limit of detachment after water immersion (21 days)          | 0.27 ± 0.17 N/mm²        |
| UNI EN ISO 10545-3:2000  | Determination of water absorbtion                            | 6%                       |
| UNI EN ISO 10545-9:2013  | Determination of resistance to thermal shock                 | No fault                 |
| UNI EN ISO 10545-12:2000 | Determination of frost resistance                            | No fault                 |
| ETAG 034-1:2012          | Wind depression load resistance                              | 3700 Pa                  |
| UNI EN 12664:2002        | Determination of thermal conductivity                        | 0.157 ÷ 0.170 W/mK       |
| MED 2014/90/EU           | Determination of calorific value                             | Passed                   |
| MED 2014/90/EU           | Determination of the limited ability to propagate the flame  | Passed                   |

## UHPC Plus Air



| FIRE TESTS                      | DESCRIPTION                                        | VALUE           |
|---------------------------------|----------------------------------------------------|-----------------|
| UNI 9177:2008                   |                                                    |                 |
| UNI 8457:2010                   | Reaction to fire                                   | Classe 1        |
| UNI 9174:2010                   |                                                    |                 |
| UNI EN 13501-1-2009             |                                                    |                 |
| UNI EN 13823:2010               | Fire classification                                | B - s1, d0      |
| NI EN ISO 11925-2:2005          |                                                    |                 |
| ASTM E 84 (UL 723)              | Surface burning characteristics                    | Class A         |
| ASTM E136                       | Behavior of materials at 750°C (1382°F)            | Non-combustible |
| CAN/ULC-S114<br>ASTM E1530:2006 | Test for Non-Combustibility                        | Non-combustible |
| ASTM C297/C297M-16              | Standard Test Method for Flatwise Tensile Strength | 1,37 ± 0,05 MPa |
| NFPA 285                        | Fire test                                          | Passed          |
| BS8414-1                        | Fire test                                          | Passed          |

| EUROPEAN TESTS                               | DESCRIPTION                                                 | VALUE                              |
|----------------------------------------------|-------------------------------------------------------------|------------------------------------|
| UNI EN ISO 10545-8:2014                      | Determination of linear thermal expansion                   | 1.6                                |
| UNI EN 772-14:2003                           | Determination of moisture movement                          | 0.04 ÷ 0.13 mm/m                   |
| UNI EN ISO 10545-4:2012<br>UNI EN 12467:2016 | Determination of the breaking strength                      | 4.3 ÷ 6.2 N/mm²<br>2.9 ÷ 3.9 N/mm² |
| UNI EN 12089:2013                            | Determination of bending behavior                           | 4160 ÷ 5867 kPa                    |
| UNI EN 12467:2016                            | Determination of frost/defrost resistance                   | No fault                           |
| UNI EN 12467:2016                            | Determination of water absorption                           | No water                           |
| UNI EN ISO 10545-9:2013                      | Determination of resistance to thermal shock                | No fault                           |
| ETAG 034-1:2012                              | Wind depression load resistance                             | 3700 Pa                            |
| MED 2014/90/EU                               | Determination of calorific value                            | Passed                             |
| MED 2014/90/EU                               | Determination of the limited ability to propagate the flame | Passed                             |



# Wind Resistance

The test was performed in accordance with the EOTA standard guideline (European Organisation for Technical Approvals) ETAG 034-1:2012 April 2012 "Guideline for European technical approval of kits for external wall claddings - Part I: Ventilated cladding kits comprising cladding components and associated fixings."





|                                    |
|------------------------------------|
| Natural Air Limestone Beige        |
| Natural Air Limestone Gray         |
| UHPC Ultralight - Bianco           |
| UHPC Ultralight - Crema            |
| UHPC Ultralight - Grigio Urbano    |
| UHPC Ultralight - Giallo Imperiale |
| UHPC Ultralight - Verde Salvia     |
| UHPC Ultralight - Terracotta       |
| UHPC Ultralight - Rosso Mattone    |
| UHPC Ultralight - Marrone Gesso    |

| <br>Panel<br>24x48"<br>(610x1219 mm) | <br>External Corner<br>12x12x48"<br>(305x305x1219 mm) | <br>External Corner<br>12x12x24"<br>(305x305x610 mm) | <br>Internal Corner<br>12x12x48"<br>(305x305x1219 mm) | <br>Internal Corner<br>12x12x24"<br>(305x305x610 mm) |
|-----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| E60120NBF                                                                                                             | E3030120NBAE                                                                                                                           | E3030120NBAI                                                                                                                          | E3060120NBAE                                                                                                                             | E3060120NBAI                                                                                                                            |
| E60120NGF                                                                                                             | E3030120NGAE                                                                                                                           | E3030120NGAI                                                                                                                          | E3060120NGAE                                                                                                                             | E3060120NGAI                                                                                                                            |
| E60120UPBF                                                                                                            | E3030120UPBAE                                                                                                                          | E3030120UPBAI                                                                                                                         | E3060120UPBAE                                                                                                                            | E3060120UPBAI                                                                                                                           |
| E60120UPUF                                                                                                            | E3030120UPUAE                                                                                                                          | E3030120UPUAI                                                                                                                         | E3060120UPUAE                                                                                                                            | E3060120UPUAI                                                                                                                           |
| E60120UPSF                                                                                                            | E3030120UPSAE                                                                                                                          | E3030120UPSAI                                                                                                                         | E3060120UPSAE                                                                                                                            | E3060120UPSAI                                                                                                                           |
| E60120UPRF                                                                                                            | E3030120UPRAE                                                                                                                          | E3030120UPRAI                                                                                                                         | E3060120UPRAE                                                                                                                            | E3060120UPRAI                                                                                                                           |
| E60120UGBF                                                                                                            | E3030120UGBAE                                                                                                                          | E3030120UGBAI                                                                                                                         | E3060120UGBAE                                                                                                                            | E3060120UGBAI                                                                                                                           |
| E60120UGGF                                                                                                            | E3030120UGGAE                                                                                                                          | E3030120UGGAI                                                                                                                         | E3060120UGGAE                                                                                                                            | E3060120UGGAI                                                                                                                           |
| E60120UGBEF                                                                                                           | E3030120UGBEAE                                                                                                                         | E3030120UGBEAI                                                                                                                        | E3060120UGBEAE                                                                                                                           | E3060120UGBEAI                                                                                                                          |
| E60120UGRF                                                                                                            | E3030120UGRAE                                                                                                                          | E3030120UGRAI                                                                                                                         | E3060120UGRAE                                                                                                                            | E3060120UGRAI                                                                                                                           |

Kit Outdoor System

| <br>EasyClip | <br>Support plate<br>Horizontal 2 flaps | <br>Support plate<br>Horizontal 4 flaps | <br>Support plate<br>Vertical 2 flaps | <br>Support plate<br>Vertical 1 flaps | <br>Rivet for<br>Clip/profile | <br>Rivet for<br>Clip/panel |
|-------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| ECLIP500                                                                                        | ECLIP2SO502                                                                                                                | ECLIP4SO500                                                                                                                | ECLIP2SV503                                                                                                              | ECLIP1S504                                                                                                               | ERIV3101000                                                                                                      | ERIV512100                                                                                                     |






Kit Indoor System

| <br>EasyPlate | <br>Screw |
|----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
| EABS500                                                                                            | EVIT1000                                                                                       |

# Packaging



|      | SIZE            | THICKNESS | TYPE  | DIMENSION                              | PCS | Sqm      | WEIGHT    |
|------|-----------------|-----------|-------|----------------------------------------|-----|----------|-----------|
| 1    |                 |           |       |                                        |     |          |           |
| mm   | 610x1219 mm     | 19 mm     | Cassa | A 936 - B 1264 - C 1350 mm             | 72  | 51,84 m² | 1244 Kg   |
| inch | 24x48"          | 3/4"      | Cassa | A ~ 3' 3/4"- B ~ 4' 1 3/4" - C ~ 4' 6" | 72  | 558 ft²  | 2742,5 lb |
| 2    |                 |           |       |                                        |     |          |           |
| mm   | 305x305x1219 mm | 19 mm     | Cassa | A 936 - B 1264 - C 1350 mm             | 64  | 46,08 m² | 1106 Kg   |
| inch | 12x12x48"       | 3/4"      | Cassa | A ~ 3' 3/4"- B ~ 4' 1 3/4" - C ~ 4' 6" | 64  | 496 ft²  | 2438,3 lb |
| 3    |                 |           |       |                                        |     |          |           |
| mm   | 305x305x610 mm  | 19 mm     | Cassa | A 800 - B 1294 - C 870 mm              | 64  | 23,04 m² | 576 Kg    |
| inch | 12x12x24"       | 3/4"      | Cassa | A ~ 2' 7 1/2" - B ~ 4' 3" - C ~ 2' 10" | 64  | 248 ft²  | 1269,8 lb |

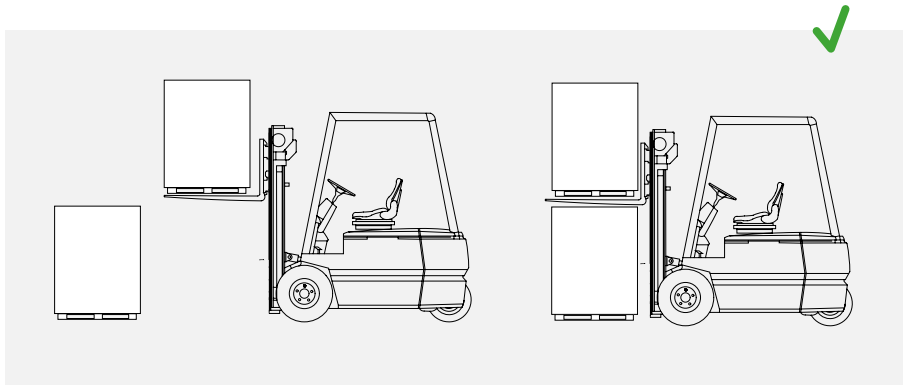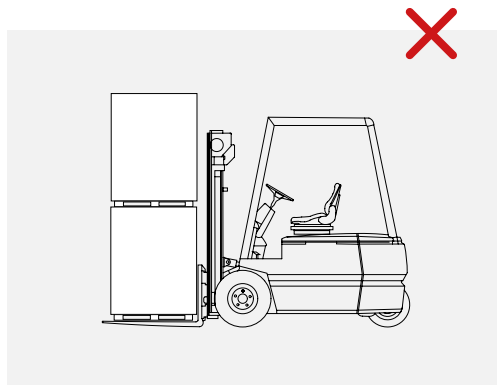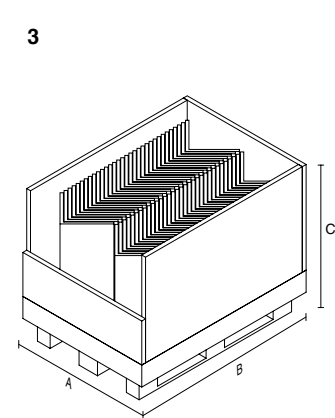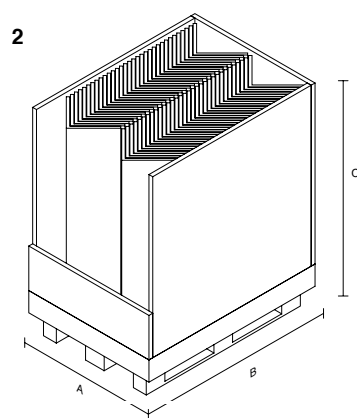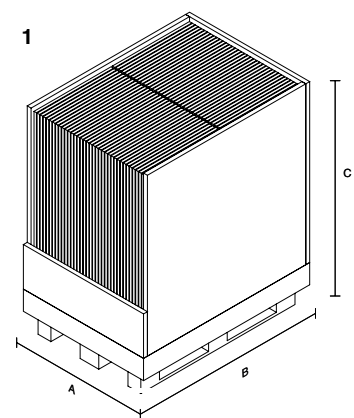

# Contact

---

**Headquarters**  
T. +39 0761 5051  
info@gammastone.com

**Production Plant - Technical Office**  
T. +39 0761 184 0234  
info@gammastone.com

---

**GammaStone North America Inc.**  
Tel. +1 646 741 5850 | Tollfree: +1 866 US GAMMA  
info.na@gammastone.com

**[gammastone.com](http://gammastone.com)**

